



150

Soft Serve Freezer

Single Flavour, Taylormate®

Features

Offer all the popular soft serve variations from low, non-fat or rich dairy ice creams to yogurt and sorbet.

Freezing Cylinder

One, 1.4 litre.

Mix Hopper

One, 7.6 litre. Separate hopper refrigeration (SHR) maintains mix below 5°C in Auto and Standby modes.

Indicator Lights

The Mix Low light alerts the operator to add mix.

Solid State Controls

Taylor Quality Control (TQC) precisely monitors viscosity to maintain consistent quality.

Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.



Standard 6



LISTED
SA2650



Selected 50
Hz. Models

TaylorUK
Soft Serve & Frozen Beverage Equipment

Taylor Company UK

Hillview Otley Ipswich Suffolk IP6 9NP

Tel: +44 (0) 1473 892336

Fax: +44 (0) 1473 892337


www.taylor-company.co.uk

The Taylor Company USA
are an:



ISO 9001 : 2000
REGISTERED FIRM

150 Soft Serve Freezer Single Flavour, Taylormate®

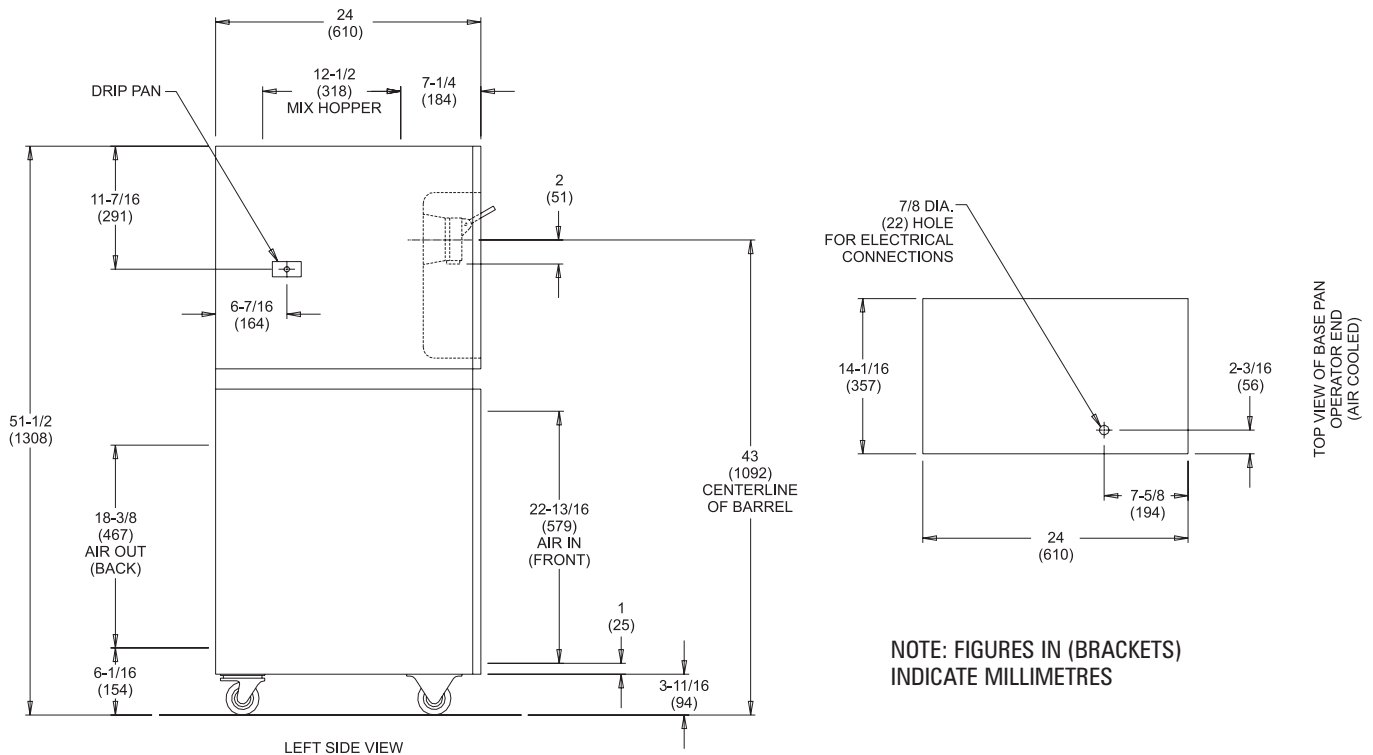

Weights	lbs.	kgs.
Net	250	113.4
Crated	337	152.9
	cu. ft.	cu. m.
Volume	23.0	0.65

Dimensions	in.	mm.
Width	14-1/16	357
Depth	24	610
Height	51-1/2	1308
Floor Clearance	3-11/16	94

*Mounted on standard casters

All machines are air cooled

Electrical spec
220-240/50/1 2 pole, 3 wire. Maximum fuse size 13amp

Output
Approx 12.2 Litres per hour

Specifications

Electrical

One dedicated 13 amp electrical connection is required. See the electrical chart for the proper electrical requirements. Manufactured to be cord connected.

Beater Motor

One, 0.5 HP

Refrigeration System

One, 3,000 BTU/hr. R404A.
Separate Hopper Refrigeration (SHR), One, 400 BTU/hr. R134a.
(BTUs may vary depending on compressor used.)

Air Cooled

Minimum 152 mm on both sides. Install the skirt provided on the right side of the unit and place the back of the unit against a wall to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.