



Photo shows Model 161 with optional cart

# 161

## Soft Serve Freezer

Compact Twin Twist, Taylormate®

### Features

Offer all the popular soft serve variations from low, non-fat or rich dairy ice creams to frozen yogurt and sorbet. Serve two separate soft serve flavours, or an equal combination of both in a twist.

### Freezing Cylinder

One, 1.4 litre.

### Mix Hopper

Two, 7.6 litre. Separate hopper refrigeration (SHR) maintains mix below 5°C in Auto and Standby modes.

### Indicator Lights

Mix Low light alerts the operator to add mix.

### Electronic Controls

Finished product quality is monitored by Softech™ controls that measure viscosity.

### Standby

During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.

### Air Filter

Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.



Standard 6



LISTED  
SA2650



Selected 50  
Hz. Models

**Taylor**UK  
Soft Serve & Frozen Beverage Equipment

### Taylor Company UK

Hillview Otley Ipswich Suffolk IP6 9NP

Tel: +44 (0) 1473 892336


Fax: +44 (0) 1473 892337

[www.taylor-company.co.uk](http://www.taylor-company.co.uk)

The Taylor Company USA  
are an:



# 161 Soft Serve Freezer Compact Twin Twist, Taylormate®

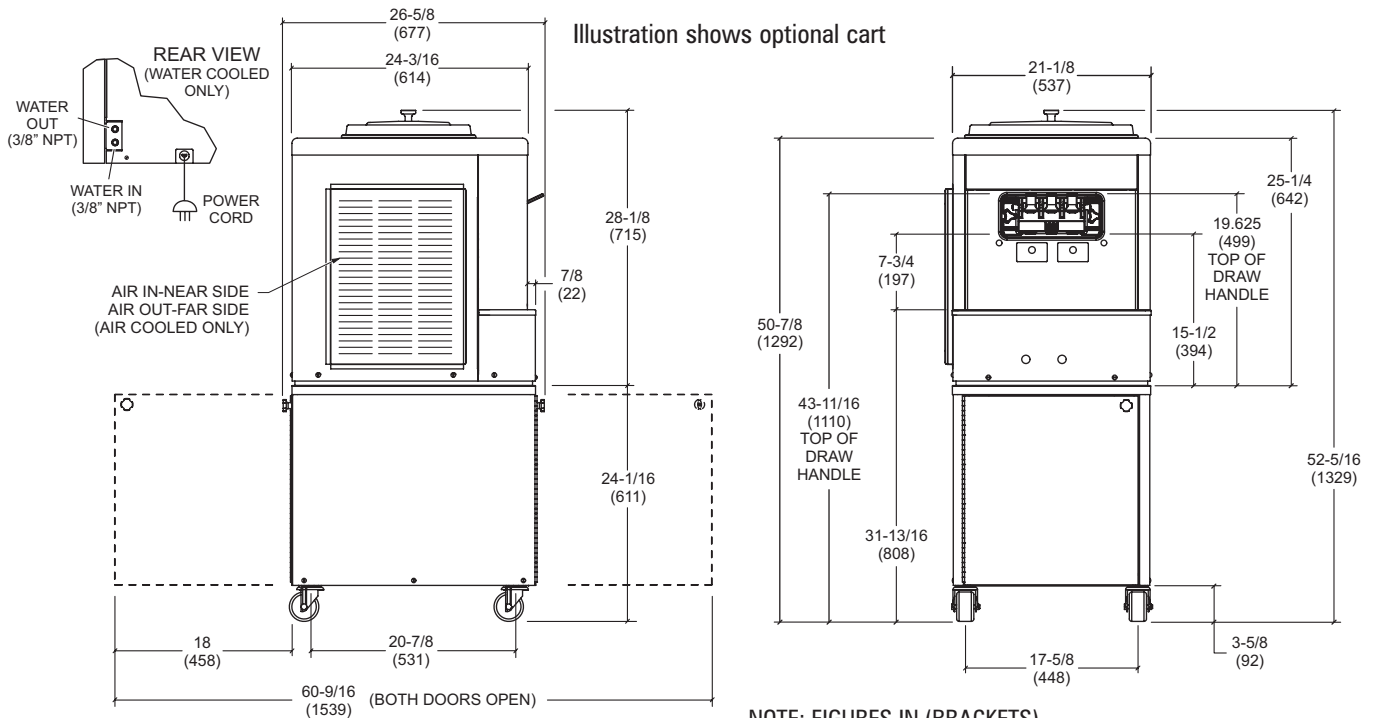

Weights	lbs.	kgs.
Net	305	138.3
Crated	355	161.0
	cu. ft.	cu. m.
Volume	17.9	0.51

Dimensions	in.	mm.
Width	21-1/8	537
Depth	26-5/8	677
Height	28-1/8	715
Counter Clearance	-----	

Designed to rest on a plastic pad directly on counter top or place on an optional cart.

## All machines supplied air cooled.

### Electrical spec

220-240/50/1 2 pole, 3 wire. Maximum fuse size 20 amp (One cable)

Two cables - maximum fuse size

13 amps per cable

### Output

Approx 12.2 (each side) Litres per hour

## Specifications

### Electrical

One dedicated 20 amp or two 13 amp electrical connections are required. See the electrical chart for the proper electrical requirements. Manufactured to be cord connected.

### Beater Motor

Two, 0.5 HP

### Refrigeration System

One, 4,900 BTU/hr compressor (nominal rating). R404A.  
Separate Hopper Refrigeration (SHR), One, 300 BTU/hr. R134a.  
(Actual BTUs will vary based on application.)

### Air Cooled

Minimum Clearance: 152 mm on left and right, hand side. Install the air deflector provided, and place the rear of the unit against the wall to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

## Optional Extras

- ▲ Water Cooled
- ▲ Water inlet and drain connections out of rear 3/8" FPT.
- ▲ Cart with casters C20400-000  
Net Weight: 47.6 kg  
Crated Weight: 59.0 kg
- ▲ Legs - [increase height of unit by 108 mm]

**Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.**