2020 HIGH h CONVEYOR



ITEM No.

Model options: 2020 CONVEYOR - SINGLE (single belt) 2020 CONVEYOR - 50/50 (50/50 split belt) 2020 CONVEYOR - 70/30 (70/30 split belt) (Standard models are NOT ventless) Standard equipment:

2x 6" belt extensions 12 Months parts and labour warranty

Optional extras: Stacking kit (can be stacked 3 high) (One kit required for each additional oven) Dual catalytic converters for ventless* operation

Performance:

•The High h Conveyor 2020 offers high-heat transfer rates for accelerated cooking, a small enough footprint to fit virtually any application, and does not require the energy consumption and higher HVAC needs of larger ovens.

Exterior Construction:

- +430 stainless steel front, top, sides and back.
- Cool to touch covers and panels.

Interior Construction:

- +All stainless steel interior construction.
- +20-inch wide cook chamber opening.

Features:

- •Small footprint with throughput exceeding other 28-inch conveyors.
- Independently-controlled top and bottom air impingement.
- •Variable-speed High h recirculating impingement airflow system.
- Stackable design up to 3 high (requires stacking kits).
- Independent top and bottom variable-speed blower motors.
- •Easy to clean mono-finger design.
- Idle mode for energy conservation.
- *Built-in self diagnostics for monitoring oven components.
- ·Left or right feed conveyor belt direction via software.
- Split belt option with individually-adjustable speed settings. (split 50/50 and 70/30)

*Ventless cooking operation supported with the exception of food classified as 'raw fatty proteins' such as, but not limited to, bone-in skin-on chicken, raw bacon, raw hamburger etc. Ultimate ventless operation is subject to local authority regulations and landlord permissions.






Taylor UK (a division of HTG Trading Ltd) 106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom 0800 838 896 - sales@taylor-company.co.uk www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - Jan 2020

20 HIGH h CONVEYOR - Ventless* Pizza Oven

0

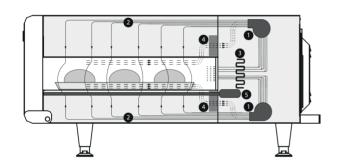


- 1. Blower motors
- 2. Impinged air
- 3. Impingement heater
- 4. Catalytic converter (optional extra)
- 5. Conveyor motor

Ventilation:

Ventless certification

+EPA 202 test (8 hr):

- Product: Pepperoni Pizzas
 - Results: 1.05 ma/m3
 - Ventless Requirement: <5.00 mg/m3
 - Product: Sandwiches
 - Results: 1.91 mg/m3 Ventless Requirement: <5.00 mg/m3
- Internal catalytic filtration to limit smoke, grease, and odour emissions.

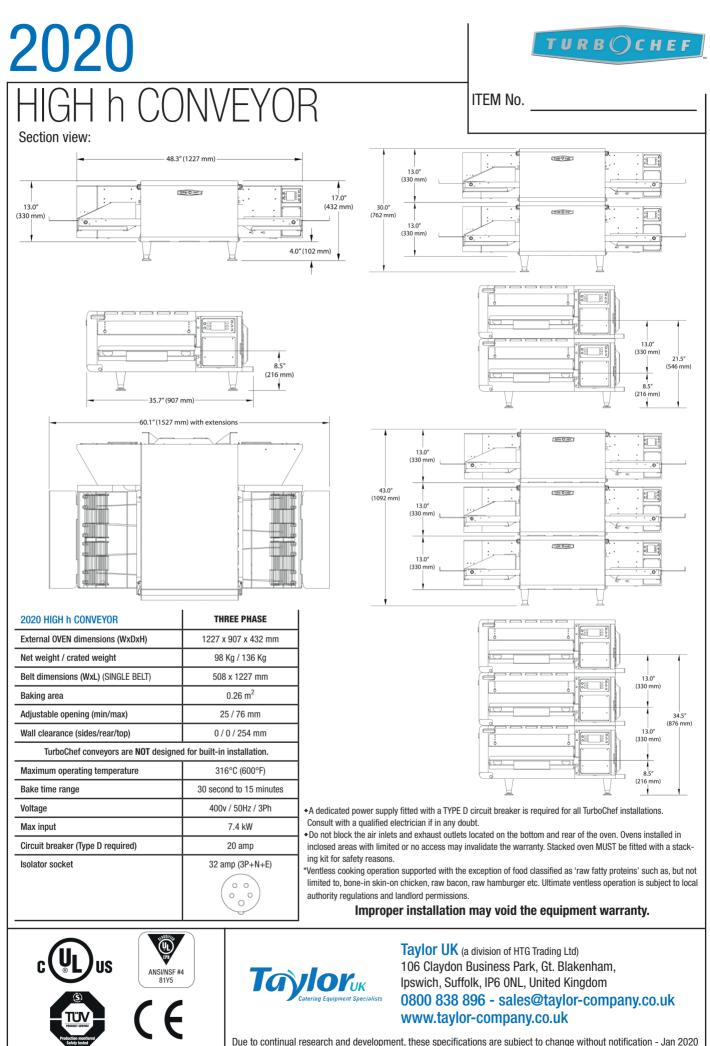

2020 HIGH h CONVEYOR - Ventless* Pizza Oven

continual research and development, these specifications are subject to change without notification - Jan 2020