

GX8Batch freezer display

The Frigomat GX range meets the needs of professionals who want to offer their customers freshly made gelato. The equipment can be customised and introduced in to existing locations or set up as an independent stand offering artisan gelato. These machines are innovative and simple tools for producing, displaying and selling an 'always fresh' product, made right in front of the customers!

Manufactured in Italy by Frigomat to ensure that European equipment quality and technology standards are met.

Load per cycle

1.5 - 2.5 Kg liquid base mix per freezing cylinder.

Hourly production

10 - 12Kg, approximately per cylinder per hour.

Double-function cylinders

Eight vertical cylinders work independently for maximum flexibility with a mix load of up to 2.5Kg each.

The cylinders feature a "Storage & Display" function and are equipped with electronic controls to keep the product at the right temperature, ready for serving.

Performance and energy consumption

Automatic management alternates the operation of the freezing cylinders, aimed to optimise the production performance whilst reducing energy and water consumption. 'Night storage' function to maintain the product during long pauses with considerable energy saving.

Simplicity of use

The system is extremely easy to use, simple to clean and to maintain. Seven electronic programmes for the freezing and storage of fresh gelato. Steel beaters feature removable scraper blades for efficient operation and easy cleaning.

The unit is fitted with a rinse hose for quick cleaning of the freezing cylinders, the internal drain system removes waste water directly from the cylinder.

Lids - practical and safe

The lids are transparent for easy inspection of the product during the freezing cycle. It features a safety 'cut out' magnet which stops the agitation should the lid be opened. This system allows the operator to work safely and inclusions like - nuts, candies, chocolates etc. can be added during the freezing cycle.

Innovative

Dedicated spatulas (patented) which, through a practical quick release system, set a new standard of hygiene, protecting the products against all kinds of contamination. The part if the scoop in contact with the gelato remains at a negative temperature in the area of the freezing cylinder, protected by the transparent domed lid. The handle remains outside the food area, at room temperature, in the defined position for visual impact and ease of use, keeping work areas clean and tidy.



Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

January 2017




Taylor UK

106 Claydon Business Park, Ipswich, Suffolk, IP6 ONL Tel: +44 (0) 1473 350000

Web: www.taylor-company.co.uk Email: sales@taylor-company.co.uk

Fax: +44 (0) 1473 350001


GX8 Batch freezer display

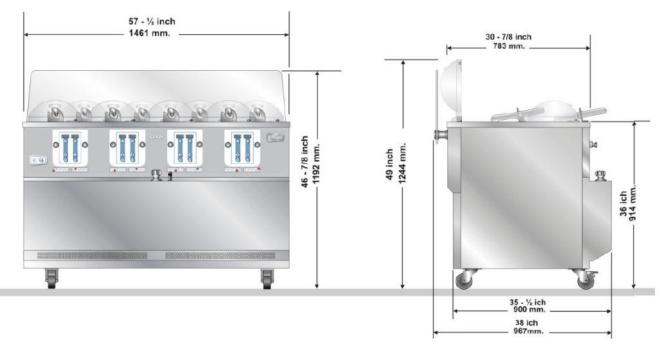

DIMENSIONS		
Height	36"	914 mm
Width	57-1/2"	1461 mm
Depth	35-1/2"	900 mm
Floor clearance*	5"	127 mm
*mounted on standard cast	cors	
Weight	1201 lbs.	545 Kg
Wall air clearance		
Тор	18"	460 mm
Back	1"	25 mm
Sides	1"	25 mm

GX8 is ONLY available WATER cooled.

WATER CONNECTIONS			
Cold water supply			
Fitting (on machine)	3/4" (22mm) Ø		
Supply temperature	13 - 20 °C (55 - 68 °F)		
Supply pressure	1 - 3 Bar (14.5 - 43.5 PSI)		
Waste pipes			
Fitting (on machine) Wash/rinse water (ALL units)	1-1/4" (32mm) Ø (Requires suitable waste water gravity drain located below the base of the unit - NOT fitted by Taylor UK)		
Fitting (on machine) Coolant water (water cooled machines)	3/4" (22mm) Ø (Requires suitable waste water drain fitted with a U-bend - NOT fitted by Taylor UK)		



ELECTRICAL SPECIFICATION - THREE PHASE			
Frigomat GX8			
Voltage	400 - 415 VAC	(00)	
Frequency	50 Hz	\°°°'	
Circuit breaker	32 amp		
Plug/socket	IEC 309, 32 amp 5-pin socket		
Nominal power	7.2 Kw		
Total amps (running)	20 per phase		



 $Continuing \ research \ results \ in \ steady \ improvements; \ therefore, \ these \ specifications \ are \ subject \ to \ change \ without \ notice.$

January 2017



Taylor UK

106 Claydon Business Park, Ipswich, Suffolk, IP6 0NL Tel: +44 (0) 1473 350000

Fax: +44 (0) 1473 350001 Web: www.taylor-company.co.uk Email: sales@taylor-company.co.uk