

PH61

Four Flavour Shake Freezer HEAT TREATMENT



ITEM No. _____

Model options:

PH61/3A Combination Freezer (three phase)

(AIR cooled as standard, water cooled units are available on request)

Standard equipment:

- Hopper agitator
- Up to 14 day cleaning cycle
- 1x Starter kit sanitiser sachets
- 1x White cleaning bucket
- 1x Tube Taylor HP foodsafe lubricant
- 1x Set Taylor cleaning brushes
- 1x Replacement tune up kit
- 12 Months parts & labour warranty

Optional extras:

- Cup holder
- Hopper locks
- Extended service contract (call for details)

Features:

Offer four separate shake flavors: chocolate, vanilla, strawberry and an optional flavor. Portion controlled shake dispensing with 'magic eye' auto shut off for high volume milkshake production.

- ♦ **Freezing Cylinder** - One, 6.6 litre
- ♦ **Hourly Production**** - 102.2 litres (approximately)
- ♦ **Heat Treatment System** - Provides a daily heating and cooling cycle to safely maintain dairy products up to two weeks (14 days) before a complete disassembly and cleaning is required.
- ♦ **Mix Hopper** - One, 18.9 litre. Refrigerated to maintain mix below 5°C. Simplified Air/mix pumps deliver the precise amount of air and mix to the freezing cylinder ensuring even overrun.
- ♦ **Indicator Lights** - Mix Low light flashes to alert the operator to add mix. When the Mix Out light flashes, the refrigeration system automatically goes into Standby mode to prevent damage..
- ♦ **Electronic Controls** - Viscosity is continually measured to serve consistent quality shakes. The LCD (Liquid Crystal Display) readout will identify temperatures in the hopper and freezing cylinder at any point of operation. History of temperatures and times during the last 13 heat cycles may be viewed.
- ♦ **Standby** - During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.
- ♦ **Syrup System** - Shake flavours are selected from touch pads. Self-contained air compressor delivers shake syrup from four, 3.8 litre syrup tanks located in the lower front compartment. Frozen shake mix and syrup automatically blends to dispense the chosen flavor. Use only single strength syrup, free from pulp and seeds.
- ♦ **Two Locking Casters** - Front casters have a locking feature for operators to lock to maintain equipment in place. The locking casters can be released to move the equipment for cleaning.



Taylor UK
Catering Equipment Specialists

Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - Jan 2020


PH61



Four Flavour Shake Freezer HEAT TREATMENT

ITEM No. _____

Section view: (Dimensions shown in brackets in mm)

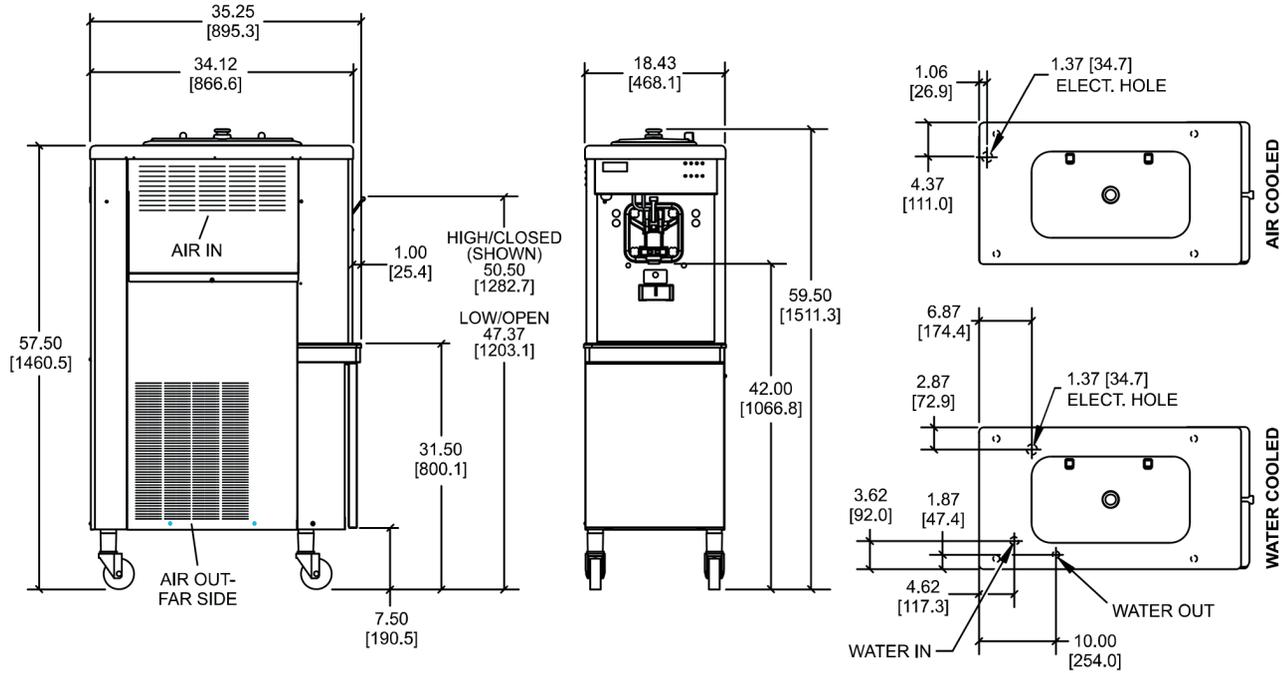

TOP VIEW - OPERATOR END
ALL CONNECTIONS LOCATED UNDERSIDE OF BASE

Taylor PH61	THREE PHASE
External dimensions (WxDxH)	469 x 896 x 1512 mm
Net weight / crated weight (freezer only)	276 Kg / 295 Kg
Wall clearance* (sides/back)	100 mm / 0 mm
Soft serve & shake freezers are NOT designed for built-in installation	
Refrigeration system	11,000 BTU/hr
Beater motor (No./Power)	1 - 1.0 HP
Cooling	Air (water cooled available on request)
Approximate hourly production**	Shake - 102.20 ltr
Voltage	400v / 50Hz / 3Ph
Minimum amp draw	20 amps
Circuit breaker	24 amp
Isolator socket	32 amp (3P+N+E)



*Minimum air clearances **MUST** be met to assure adequate airflow for optimum performance of air cooled machines. Install the deflector provided and place the back of the unit against a wall to prevent recirculation of warm air.
 **Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air flow will effect the production capacity.
 •A dedicated power supply is required for safe operation. Taylor equipment should never be operated on any form of extension lead, please consult a qualified electrician for correct installation advice.

PH61 – Four Flavour Shake Freezer, HEAT TREATMENT



Data for air cooled units.



Taylor UK (a division of HTG Trading Ltd)
 106 Claydon Business Park, Gt. Blakenham,
 Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - Jan 2020