

# C161

## Soft Serve Freezer - Two Flavour 'Twist', Gravity



ITEM No. \_\_\_\_\_

### Model options:

- ☐ C161/1A Soft Serve Freezer
- ☐ C161/1A+C204 Soft Serve Freezer with optional cart

### Standard equipment:

- 1x Starter kit sanitiser sachets
- 1x White cleaning bucket
- 1x Tube Taylor foodsafe lubricant
- 1x Set Taylor cleaning brushes
- 1x Replacement tune up kit
- 12 Months parts & labour warranty

### Optional extras:

- ☐ 4" Legs
- ☐ Frozen yogurt spec mix feed tubes
- ☐ Extended service contract (call for details)

### Features:

Offer all the popular soft serve variations from 'Whippy style' low or non-fat ice creams to custards, yogurt, sorbet and vegan desserts in two different flavours or a 'twist' of the two.

- ♦ **Freezing Cylinder** - Two, 1.4 litre
- ♦ **Hourly Production\*\*** - 22.14 litres combined (approximately)
- ♦ **Mix Hopper** - Two, 7.6 litre. Separate hopper refrigeration (SHR) maintains mix below 5°C in Auto and Standby modes.
- ♦ **Indicator Lights** - The Mix Low and Mix Out light alerts the operator to add mix. An audible alarm may be enabled to sound when mix is low.
- ♦ **Electronic Controls** - Softech™ is our exclusive microprocessor based master control that regulates refrigeration by measuring product viscosity to maintain consistent quality.
- ♦ **Standby** - During long no-use periods, the standby feature maintains safe product temperatures in the mix hopper and freezing cylinder.
- ♦ **Air Filter** - Easily removable, cleanable air filter helps keep condenser clean for optimal refrigeration system performance.
- ♦ **Door Interlock System** - Protects the operator from injury as the beater will not operate without the dispensing door in place.



**Taylor** UK  
Catering Equipment Specialists

**Taylor UK** (a division of HTG Trading Ltd)  
106 Claydon Business Park, Gt. Blakenham,  
Ipswich, Suffolk, IP6 0NL, United Kingdom  
**0800 838 896 - sales@taylor-company.co.uk**  
**www.taylor-company.co.uk**

Due to continual research and development, these specifications are subject to change without notification - Jan 2020


# C161



## Soft Serve Freezer - Two Flavour ‘Twist’, Gravity

ITEM No. \_\_\_\_\_

Section view: (Dimensions in mm shown in brackets)

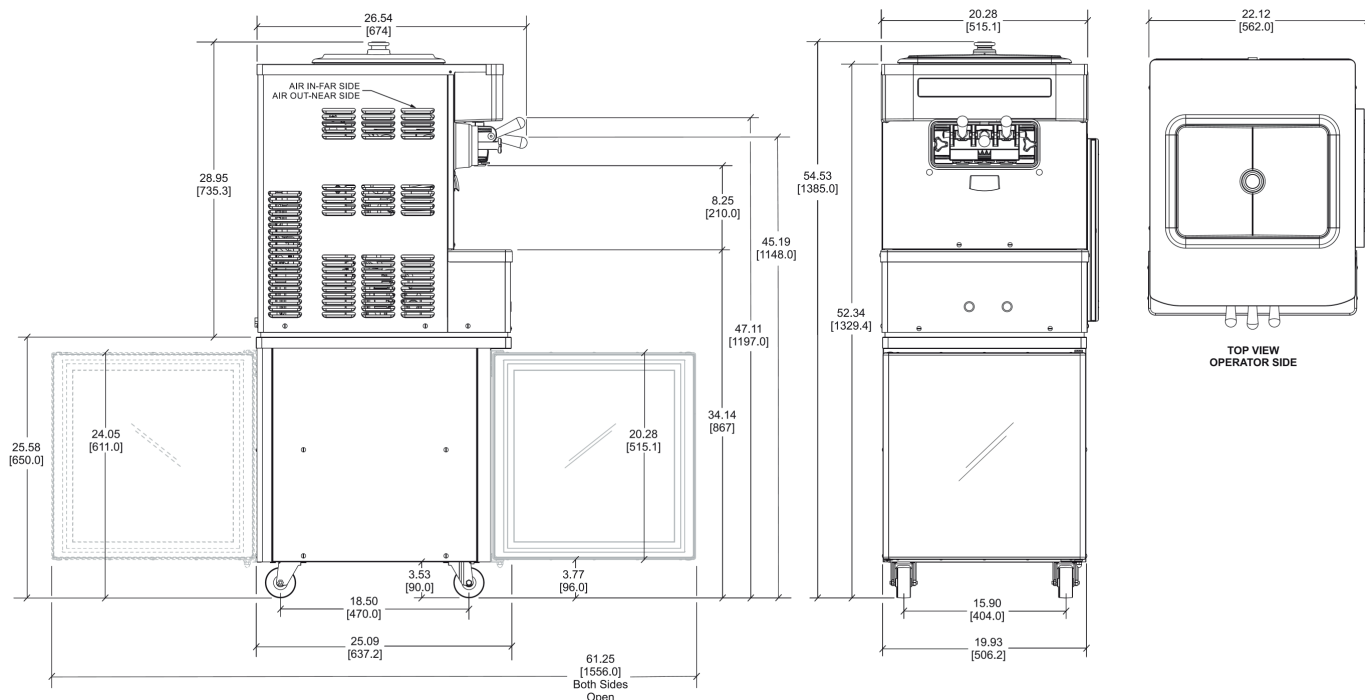

Taylor C161	SINGLE PHASE
External dimensions (WxDxH)	516 x 674 x 736 mm
External dimensions (WxDxH) on Cart	516 x 674 x 1385 mm
Net weight / crated weight (freezer only)	139 Kg / 159 Kg
Wall clearance* (sides/back)	150 mm / 0 mm
Soft serve freezers are <b>NOT</b> designed for built-in installation	
Refrigeration system - Main	3,500 BTU/hr
Refrigeration system - Hopper	400 BTU/hr
Beater motor (No./Power)	2 - 0.5 HP
Cooling	Air ONLY
Approximate hourly production**	22.14 ltr
Voltage	230v / 50Hz / 1Ph
Total amp draw	10 amps
Circuit breaker/fuse	13 amp
Isolator socket	13 amp (1P+N+E)



\*Minimum air clearances **MUST** be met to assure adequate airflow for optimum performance of air cooled machines. Place the back of the unit against a wall to prevent recirculation of warm air.  
 \*\*Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air flow will effect the production capacity.  
 ♦ A dedicated power supply is required for safe operation. Taylor equipment should never be operated on any form of extension lead, please consult a qualified electrician for correct installation advice.

Data for air cooled units.



**Taylor UK** (a division of HTG Trading Ltd)  
 106 Claydon Business Park, Gt. Blakenham,  
 Ipswich, Suffolk, IP6 ONL, United Kingdom  
**0800 838 896 - sales@taylor-company.co.uk**  
**www.taylor-company.co.uk**

Due to continual research and development, these specifications are subject to change without notification - Jan 2020