

PANAVISION



Frozen pastry showcase



Model PANAVISION RV



ITEM No. _____

Model options:

PANAVISION RV

Standard equipment:

- Cool white LED lighting 5700 K°
- Front panel - **Stainless steel**
- Lower front grill - **Stainless steel**
- Side panels - **Stainless steel**
- Two refrigerated glass shelves (split into 4 sections)
- Internal display surface - **Stainless steel**
- Heated glass upper structures
- Swivel castors with brake

Optional extras:

- Tray for cup cakes (420 x 140 x 30H mm)
- Tray for ice lollies (250 x 360 x 43H mm)

Features:

- ◆ Panavision is a low temperature, frozen display case for the retail display of ice cream cakes, frozen desserts and single portions.
- ◆ Panavision has a cold air flow refrigeration system (designed by the ISA R&D Centre) that allows uniform temperature distribution in order to ensure perfect storage of the products on display.
- ◆ Panavision's performance is absolutely impeccable. Its visibility, capacity and quality lead to customer satisfaction from both the aesthetic and technical point of view thanks to its Italian design.



ENERGY SAVING
LED lights + EC fan motor



REFRIGERATION
Ventilated



DEFROST
Hot gas



REFRIGERANT
R404A



INSTALLATION
Plug-In



TEMPERATURE
-15 / +18 °C



CLIMATE CLASS
7



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - June 2019


PANAVISION



Frozen pastry showcase

Section view: (all dimensions in mm)

ITEM No. _____

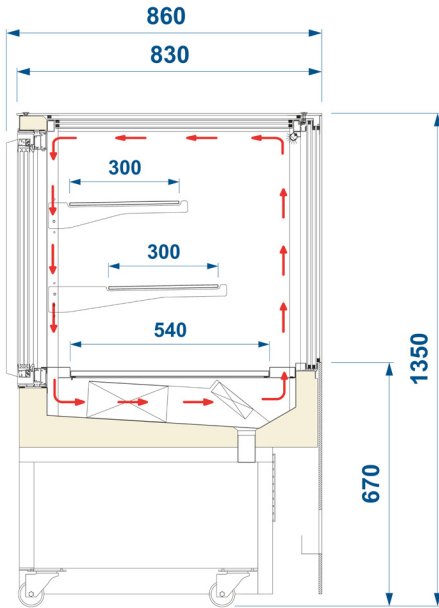

PANAVISION*	PANAVISION RV
External dimensions (LxDxH)	1260 x 860 x 1350 mm
Net weight	300 kg
Shelf dimensions (LxD)	1130 x 300 mm
Display base dimensions (LxD)	1100 x 540 mm
Refrigeration	Ventilated
Refrigerant	R404A
Climate class	7
Operating conditions	35 °C / 75 %RH
Product storage temperature	-15 / -18 °C
Compressor (no. - type)	2 - Hermetic
Defrost process	Hot gas
Power supply voltage	400v / 50hz / 3ph
Electrical input (nominal)	2200 w / 4.6 A
Electrical input (defrost)	2800 w / 8.5 A

PANAVISION – Frozen pastry showcase



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



*Data for air cooled units.



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - June 2019