

Frozen Beverage Freezer - Two Flavour, Gravity



ITEM No. _____

Model options:

- ☐ 432/1A Frozen Beverage Freezer (single phase)
- ☐ 432/3A Frozen Beverage Freezer (three phase)

Standard equipment:

- 1x Starter kit sanitiser sachets
- 1x White cleaning bucket
- 1x Tube Taylor foodsafe lubricant
- 1x Set Taylor cleaning brushes
- 1x Replacement tune up kit
- 12 Months parts & labour warranty

Optional extras:

- ☐ C206 cart with castors
- ☐ Panel spinner
- ☐ Top air discharge chute (factory order)
- ☐ Extended service contract (call for details)

Features:

Vary your menu by offering American style thick shakes, fruit smoothies, frozen cocktails & 'mocktails', iced coffee's & frappaccinos, slush and dairy-free vegan beverages. Serve two different flavours or products at the perfect level of thickness.

- ♦ **Freezing Cylinder** - Two, 3.8 litre
- ♦ **Hourly Production**** - Thick Shake - 40.8 litres (combined)
Fruit Slush - 34.1 litres
Frozen Cocktail - 23.8 litres (approximately)
- ♦ **Mix Hopper** - Two, 11.4 litre. Refrigerated to maintain mix below 5°C. Approved for dairy and non-dairy products.
- ♦ **Indicator Lights** - Add Mix light alerts the operator to add mix. When the Mix Out light flashes, the unit automatically shuts down to prevent damage.
- ♦ **Automatic Consistency Control** - A specially designed viscosity control automatically maintains superior product quality. An adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.
- ♦ **Illuminated Display** - Self-merchandising Illuminated display backlights the static cling flavour card and downlights the dispensing door. Five static clings are provided: Frozen Cappuccino, Frozen Cocktails, Frozen Drinks, Shakes, and Smoothies.
- ♦ **Flavor Burst™ FB80S Compatible** (call for details)



Taylor UK
Catering Equipment Specialists


Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - Jan 2020



Frozen Beverage Freezer - Two Flavour, Gravity

ITEM No. _____

Section view: (Dimensions shown in brackets in mm)

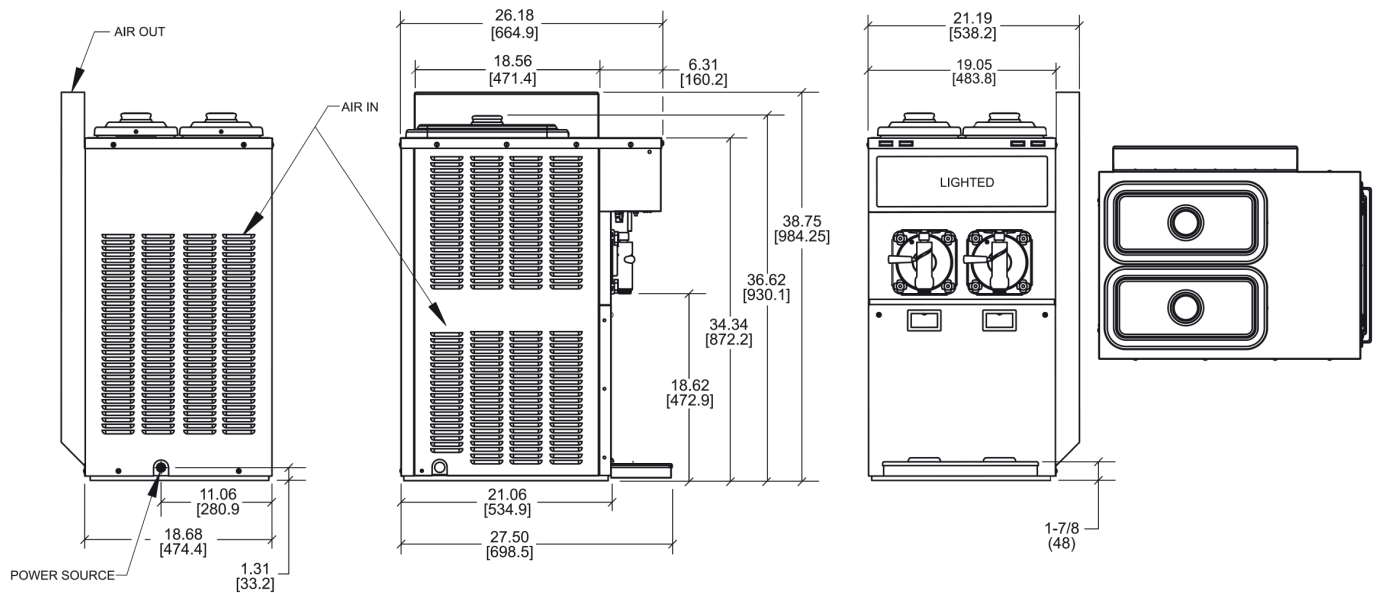

Shown with optional top air discharge chute.

Taylor 432	SINGLE PHASE		THREE PHASE
External dimensions (WxDxH)	484 x 665 x 931 mm		
Net weight / crated weight (freezer only)	139 Kg / 163 Kg		
Wall clearance* (sides/back)	150 mm / 0 mm		
Frozen beverage freezers are NOT designed for built-in installation			
Refrigeration system	7,500 BTU/hr		
Beater motor (No./Power)	2 - 0.25 HP		
Cooling	Air ONLY		
Approximate hourly production**	Thick Shake - 40.8 ltr Fruit Slush - 34.1 ltr Frozen Cocktail - 23.8 ltr		
Voltage	230v / 50Hz / 1Ph	400v / 50Hz / 3Ph	
Total amp draw	13 amps	9 amps per phase	
Circuit breaker	16 amp	10 amp	
Isolator socket	16 amp (1P+N+E) 	16 amp (3P+N+E) 	



Shown with optional top air discharge chute.

*Minimum air clearances **MUST** be met to assure adequate airflow for optimum performance of air cooled machines. Place the back of the unit against a wall to prevent recirculation of warm air. No air gap is required on right of machine when discharge chute is fitted.
**Hourly production figures are approximate and based on optimum operating conditions. Product type, ambient air temperature and air flow will effect the production capacity.
•A dedicated power supply is required for safe operation. Taylor equipment should never be operated on any form of extension lead, please consult a qualified electrician for correct installation advice.

Data for air cooled units.



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - Jan 2020