

BERMUDA LX

Gelato display with ventilated refrigeration



Model LX RV 10



Customisable area:

Model LX RV 10 - 1320 x 500 mm
Model LX RV 13 - 1650 x 500 mm



ITEM No. _____

Model options:

- BERMUDA LX RV 10
- BERMUDA LX RV 13

Standard equipment:

- Cool white LED lighting 5700 K°
- Work top - Grey (RAL9006)
- Side panels - Grey (E_Z065)
- Lower front grill - Grey (E_Z065)
- Front panel - Sticker PM_AD7_BM
- Swivel castors with brake
- Self rolling night curtain

Optional extras:

- 5 Lt standard Napoli pan (S/S)
- 4.75 Lt Napoli pan (S/S) (requires support kits)
- White cone holder
- Scoop wash (S/S)
- Alternative front stickers (call for details)

Features:

- ◆ Gelato display cabinet with ventilated refrigeration system and hot gas automatic defrost.
- ◆ Climate friendly R290 Propane refrigerant.
- ◆ Built-in refrigerated storage cell for 4 (mod.10) or 6 (mod.13) standard 5ltr Napoli containers.
- ◆ Body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with CO2.
- ◆ Interior and exterior in painted sheet steel; external aesthetic side panels in stratified wood.
- ◆ Glass structure with low emission and tempered glass; curved front glass shape and LED lighting.
- ◆ Closure on operators side with night curtain.
- ◆ Hermetic condensing unit with electronic control board.
- ◆ Structure in powder coated carbon steel.
- ◆ Four castors, two with brakes to facilitate easier handling.

ENERGY SAVING
LED lights

REFRIGERATION
Ventilated

DEFROST
Hot gas

REFRIGERANT
R290

INSTALLATION
Plug-In

TEMPERATURE
-16 / -14 °C

CLIMATE CLASS
4

ENERGY RATING
E



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021


BERMUDA LX - Gelato display with ventilated refrigeration - 10/13 flavour

BERMUDA LX



Gelato display with ventilated refrigeration

Section view: (all dimensions in mm)

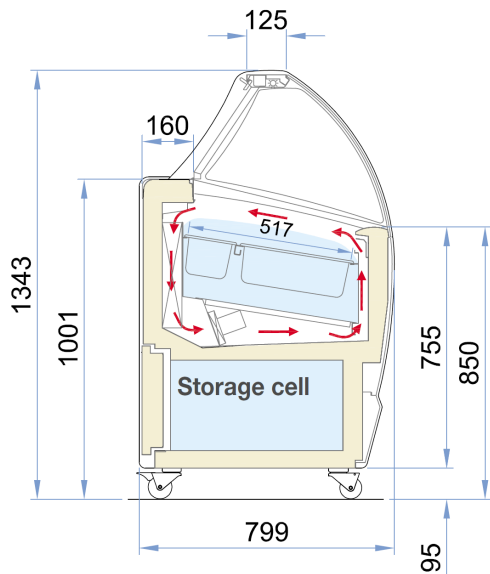

ITEM No. _____

Napoli configuration:

	5 Lt (STD) 360 x 165 x 120(h) mm	
	Display	Storage
Model RV 10	10	4
Model RV 13	13	6

	4.75 Lt 260 x 157 x 170(h) mm	
	Display	Storage
Model RV 10	14	4
Model RV 13	18	6

(Requires additional support kits - call for details)

Optional front stickers:



BERMUDA LX		Model type	Display area m ²	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H134	134	IGF2	0.59	G2	-15 °C	E (R290)	51.60	8,103
	167	IGF2	0.77	G2	-15 °C	E (R290)	54.00	9,563

Configuration: air cooled plug-in unit (R290) polycarbonate tilting panel closure, LED lighting

BERMUDA LX*	RV TB 10	RV TB 13
External dimensions (LxDxH)	1340 x 799 x 1343 mm	1670 x 799 x 1343 mm
Capacity (gross/net)	300 / 255 Lt	395 / 325 Lt
Net weight	190 kg	200 kg
Refrigeration	Ventilated	
Refrigerant	R290	
Climate class	4	
Operating conditions	30 °C / 55 %RH	
Product storage temperature	-16 / -14 °C	
Compressor (no. - type)	1 - Hermetic	2 - Hermetic
Defrost process	Hot gas	
Power supply voltage	230v / 50hz / 1ph	
Electrical input (nominal)	770 w / 4.3 A	1340 w / 6.7 A
Electrical input (defrost)	1410 w / 6.9 A	2200 w / 10.4 A



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

*Data for air cooled units. Water cooled and remote installations are available on request.