

Professional mobile pozzetti gelato cart



ITEM No. _____

Model options:

(SIX flavour)

BERRY T1 - Single Temperature

Standard equipment:

Front panel - White (RAL9016)

Side panel - White (RAL9016)

Work top - Glacier white Corian™

Swivel castors with brake

Standard carapine (pozzetti) lids

Optional extras:

7 Lt 200 x 250h mm carapine container

Piramide style pozzetti lids

Toppings container

Built-in battery pack (8hr) (call for details)

1.3HP/1Kw Electrical generator (call for details)

Custom RAL panel colours (call for details)

Front & side panel colours - Black RAL 9017

Cream RAL 9001

Features:

- ◆ ISA rethinks the rules for 'on-the-road' ice cream sales. Futuristic design with smart and technological solutions and high quality materials.
- ◆ For the best quality for your ice cream, it is also available with built-in power generator.



ENERGY SAVING
LED lights + EC fan motor



REFRIGERATION
Static with stirrer



DEFROST
Manual



REFRIGERANT
R452A



INSTALLATION
Plug-In
Plug-In + Battery (optional)
Plug-In + Generator (optional)



TEMPERATURE
-16 / -14 °C



CLIMATE CLASS
7



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK
Catering Equipment Specialists

Taylor UK (a division of HTG Trading Ltd)

106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom

0800 838 896 - sales@taylor-company.co.uk


www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021

Professional mobile pozzetti gelato cart

Section view: (all dimensions in mm)

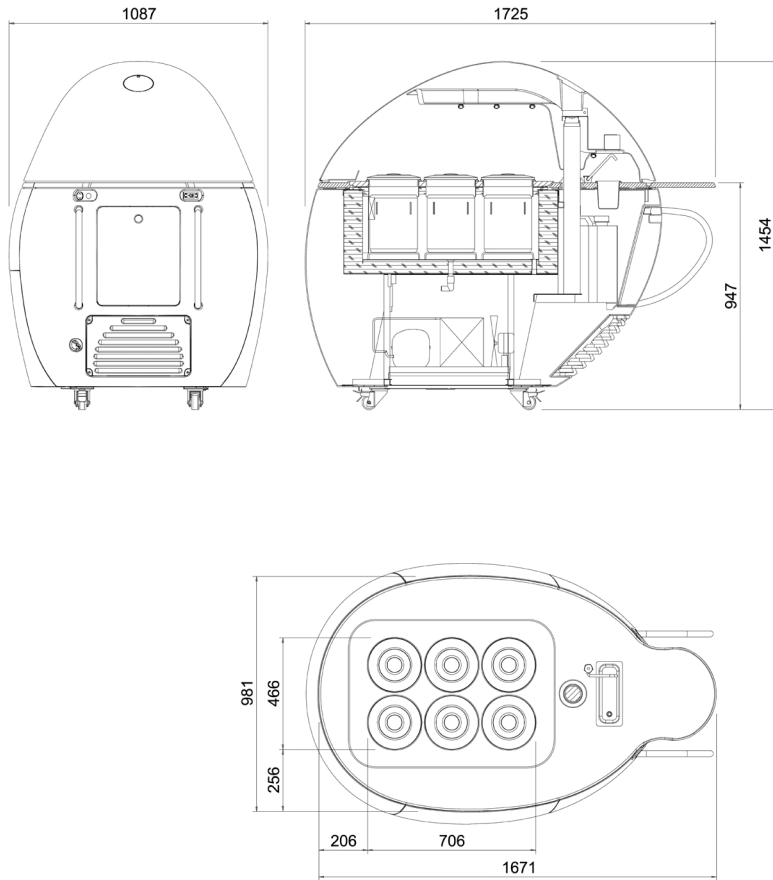

ITEM No. _____



Carapine configuration:



7 Lt Carapine
200 x 250(h) mm

Display
6

Model - BERRY

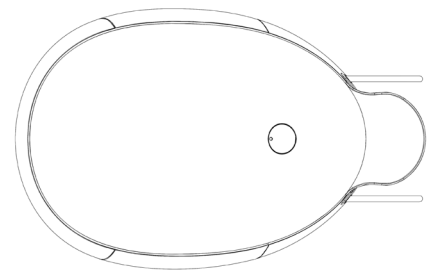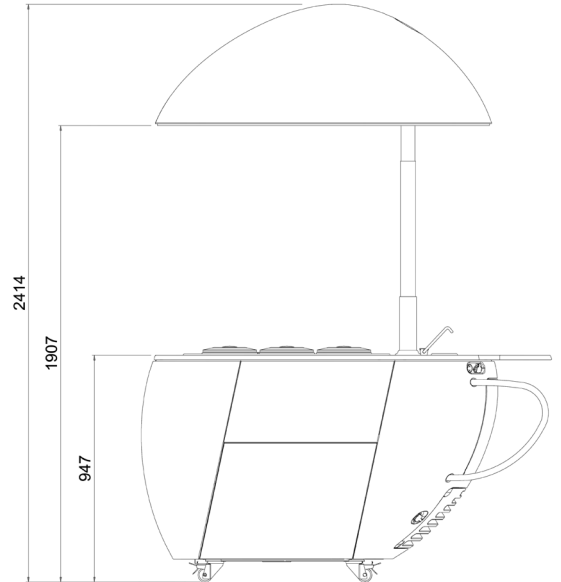

BERRY*	BERRY
External dimensions (LxDxH) LID CLOSED	1725 x 1087 x 1454 mm
External dimensions (LxDxH) LID RAISED	1725 x 1087 x 2414 mm
Net weight	240 kg
Refrigeration	Static - fan assisted
Refrigerant	R452A
Climate class	7
Operating conditions	35 °C / 75 %RH
Product storage temperature	-16 / -14 °C
Compressor (no. - type)	1 - Hermetic
Defrost process	Manual
Power supply voltage	230v / 50hz / 1ph
Electrical input (nominal)	330 w / 1.7 A



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK
Catering Equipment Specialists

Taylor UK (a division of HTG Trading Ltd)

106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom

0800 838 896 - sales@taylor-company.co.uk

www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.