IL CARRETTI	NO SA
	ITEM No
CLASSIC Gelato cart	Model options:
	Standard equipment: Straight glass Work top - Bright stainless steel Body colour - Yellow Built-in scoop washer Water tap Water tanks Two wheels and one pivoting castor Sun canopy (cream/brown stripes)
2 8	Optional extras: 5 Lt standard Napoli pan (S/S) 4.75 Lt Napoli pan (S/S) (requires support kits) Choice of body colours; White, Black or Brown
	PLEASE NOTE: The IL Carrettino is designed for fixed installations and is NOT a mobile cart.
	Features:
	 Gelato trolley with ventilated refrigeration system, finned evaporator and hot gas automatic defrost.
Model IL CARRETTINO CLASSIC - YELLOW	 and hot gas automatic defrost. Climate friendly R290 Propane refrigerant. A second level of standard 5 litre Napoli containers (120mm H) can be stored beneath the display level. Body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with C02. Internal tank and service top finished in bright stainless steel with LED lighting. External tank in carbon steel with graphics and external base finished in painted sheet steel. Straight tempered glass upper structure. Closure on the operators side with methacrylate panel. Sun canopy with side supports in tubular stainless steel. Hermetic condensing unit with electronic control board. Main structure in powder coated carbon steel. Two main wheels with one pivoting wheel. Handle in tubular stainless steel for easier handling.
INSTALLATION Plug-ln Ventriated Ventriated TEMPERATURE -16 / -14 °C	CLIMATE CLASS
IN THE AND THE	Taylor UK (a division of HTG Trading Ltd) 106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom 0800 838 896 - sales@taylor-company.co.uk Due to continual research and development, these specifications are subject to change without notification.

CARRETTINO CLASSIC - Gelato display trolley - 6 flavour

IL CARRETTINO CI ASSIC Gelato cart

2000

1662

1130

560

350


Section view: (all dimensions in mm)


471


127


395









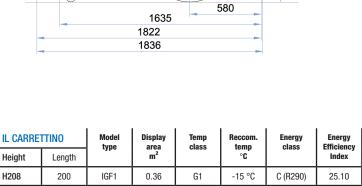

Configuration: air cooled plug-in unit (R290) polycarbonate tilting panel closure, LED lighting

CLASSIC
2000 x 1285 x 2081 mm
260 / 104 Lt
205 kg
Ventilated
R290
4
30 °C / 55 %RH
-16 / -14 °C
1 - Hermetic
Hot gas
230v / 50hz / 1ph
4700 w / 2.2 A
750 w / 3.5 A



Annual

Energy kWh/A

3,285

Taylor UK (a division of HTG Trading Ltd) 106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom

0800 838 896 - sales@taylor-company.co.uk www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

ISO

ISO 9001

14001