


FIJI LX

Promotional ice cream cabinet



Model RV 6

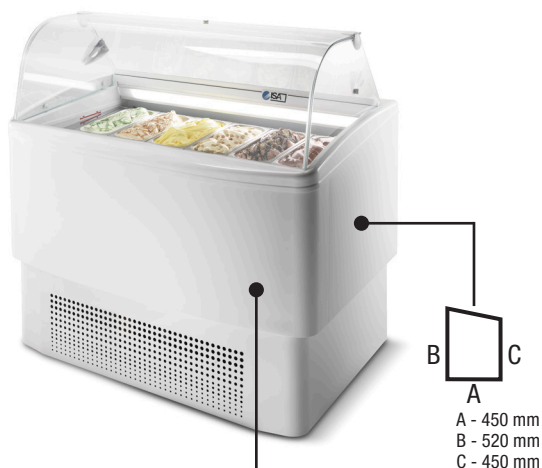

Customisable area:
 Model 4 - 720 x 425 mm
 Model 6 - 1110 x 425 mm
 Model 7 - 1250 x 425 mm

ITEM No. _____

Model options:

- FIJI RV TB 4
- FIJI RV TB 6
- FIJI RV TB 7

Standard equipment:

- Cool white LED lighting 5700 K°
- Front & side panels - White
- Swivel castors with brake
- Tilting panel on operators side

Optional extras:

- 5 Lt standard Napoli pan (S/S)
- 4.75 Lt Napoli pan (S/S) (requires support kits)
- White cone holder
- Scoop wash (S/S)
- Front glass riser - (call for details)

Features:

- ◆ Promotional display cabinet with ventilated refrigeration system finned evaporator and automatic hot gas defrosting.
- ◆ A second level of standard 5 litre Napoli containers (120mm H) can be stored beneath the display level.
- ◆ Body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with CO2.
- ◆ Interior and exterior in plasticised metal sheet.
- ◆ Work surface in plasticised metal sheet.
- ◆ Pivoting methacrylate closure on operators side.
- ◆ Tempered curved glass structure with internal LED lighting.
- ◆ Hermetic condensing unit with electronic control board.
- ◆ Structure in powder coated carbon steel.
- ◆ Four swivel casters with locking brakes.

ENERGY SAVING
LED lights

REFRIGERATION
Ventilated

DEFROST
Hot gas

REFRIGERANT
R290

INSTALLATION
Plug-In

TEMPERATURE
-16 / -14 °C

CLIMATE CLASS
7

ENERGY RATING
C




Taylor UK (a division of HTG Trading Ltd)
 106 Claydon Business Park, Gt. Blakenham,
 Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021


Promotional ice cream cabinet

Section view: (all dimensions in mm)

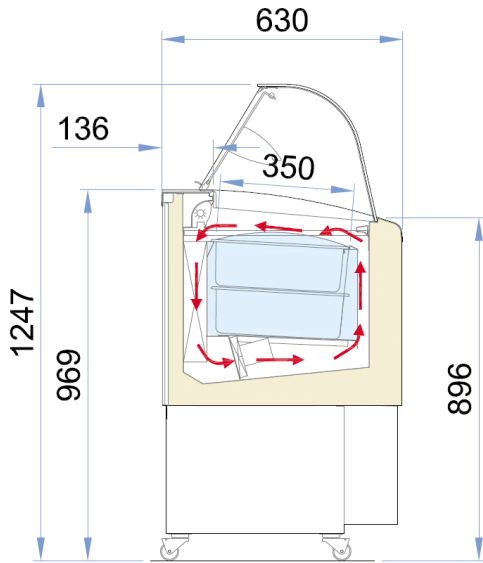

ITEM No. _____

Napoli configuration:



5 Lt (STD)
360 x 165 x 120(h) mm

Model RV TB 4
Model RV TB 6
Model RV TB 7

Display

4+(4)
6+(6)
7+(7)



4.75 Lt
260 x 157 x 170(h) mm

Model RV TB 4
Model RV TB 6
Model RV TB 7

Display

4
6
7

(Requires additional support kits - call for details)

FIJI LX		Model type	Display area m ²	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
	82	IGF1	0.24	G2	-15 °C	C (R290)	22.20	2,373
	121	IGF1	0.36	G2	-15 °C	C (R290)	23.70	3,099
	135	IGF1	0.42	G2	-15 °C	C (R290)	25.20	3,468

Configuration: air cooled plug-in unit (R290) polycarbonate tilting panel closure, LED lighting

FIJI LX*	RV TB 4	RV TB 6	RV TB 7
External dimensions (LxDxH)	824 x 630 x 1247 mm	1214 x 630 x 1247 mm	1354 x 630 x 1247 mm
Capacity (gross/net)	218 / 119 Lt	339 / 185 Lt	383 / 209 Lt
Net weight	67 kg	99 kg	110 kg
Refrigeration	Ventilated		
Refrigerant	R290		
Climate class	7		
Operating conditions	35 °C / 75 %RH		
Product storage temperature	-16 / -14 °C		
Compressor (no. - type)	1 - Hermetic		
Defrost process	Hot gas		
Power supply voltage	230v / 50hz / 1ph		
Electrical input (nominal)	555 w / 2.5 A	900 w / 4.1 A	900 w / 4.1 A
Electrical input (defrost)	1425 w / 6.5 A	1860 w / 7.5 A	1860 w / 7.5 A



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

*Data for air cooled units. Water cooled and remote installations are available on request.