

MARIN RS/RV



Glass fronted upright freezer



Model RS TB 340



Model RV TB 470 with optional black door surround

ITEM No. _____

Model options:

(RS = STATIC REFRIGERATION)

MARIN RS TB 340

MARIN RS TB 470

(RV = VENTILATED REFRIGERATION)

MARIN RV TB 340

MARIN RV TB 470

*RS models have seven fixed shelves

RV models have five adjustable shelves

TB = FROZEN ONLY

Standard equipment:

5x Grids & supports - RV version ONLY

7x Fixed shelves - RS version ONLY

1x Bottom grid

Cool white LED lighting 5700 K°

External - White pre-painted sheet

Internal - White pre-painted sheet

Unidirectional runners with adjustable feet

Glass door with grey surround

Optional extras:

Additional grids & supports

Additional bottom grid

Black door surround

Digital screen (call for details)

Features:

- ◆ Upright frozen display cabinet with static (RS) or ventilated (RV) refrigeration with partial double glazing and insulated door.
- ◆ Monolithic structure with 60 mm thick ecological polyurethane insulation (HCFC and HFC free) with CO2. Interior and exterior in white plastic sheet metal.
- ◆ Aluminium door frame painted grey colour and self-closing facility with self return hinges. Large door handle for easy grip.
- ◆ Cool white LED lighting.
- ◆ Carbon powder-coated steel frame with rollers for easy handling and two adjustable feet to stabilize the cabinet. Control panel with electronic control.
- ◆ Automatic self-evaporating condensate drip tray. Hermetic condensing unit.
- ◆ Manual defrost on static (RS) model, hot gas defrost on ventilated (RV) version.



ENERGY SAVING
LED lights



REFRIGERATION
Static - RS
Ventilated - RV



DEFROST
Manual - RS
Hot gas - RV



aria REFRIGERANT
R290



INSTALLATION
Plug-In



TEMPERATURE
-18 °C - RS
-18 / -16 °C - RV



CLIMATE CLASS
7



ENERGY RATING
D



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021


Glass fronted upright freezer

Section view: (all dimensions in mm)

ITEM No. _____

RS TB - STATIC REFRIGERATION


340 470

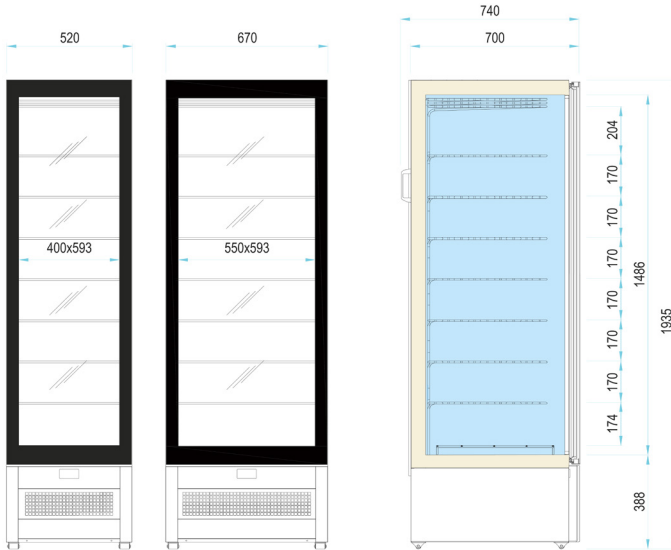

MARIN RS TB	340	470
Grid dimensions (LxD) (FIXED)	390 x 495 mm	540 x 495 mm
Bottom grid dimensions (LxD)	385 x 435 mm	353 x 435 mm

RV TB - VENTILATED REFRIGERATION

340 470

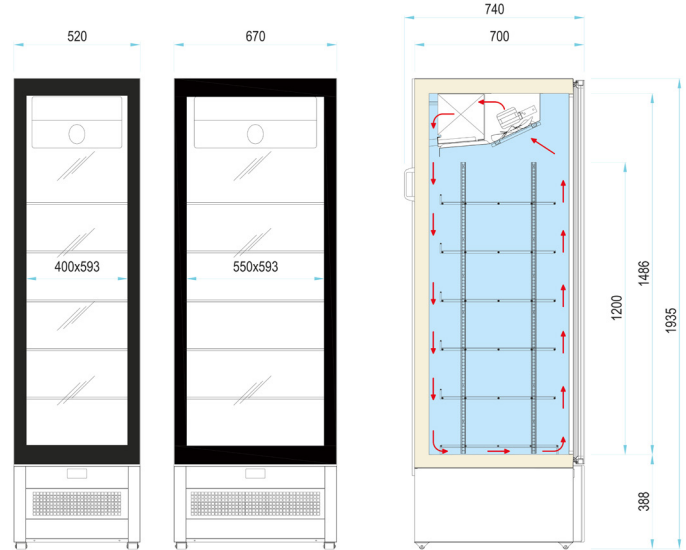

MARIN RV TB	340	470
Grid dimensions (LxD)	380 x 470 mm	530 x 470 mm
Bottom grid dimensions (LxD)	385 x 435 mm	353 x 435 mm

MARIN RS/RV		Model type	Display area m ²	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H193 340	RS 52	IVF4	0.57	L1	-20 °C	D (R290)	39.30	2,920
	RV 52	IVF4	0.57	L1	-20 °C	D (R290)	35.40	2,701
H193 470	RS 67	IVF4	0.79	L1	-20 °C	D (R290)	43.30	3,942
	RV 67	IVF4	0.79	L1	-20 °C	D (R290)	37.70	3,431

Configuration: air cooled plug-in unit (R290) self closing swing door opening, LED lighting

MARIN RS/RV*	340 RS TB	340 RV TB	470 RS TB	470 RV TB
External dimensions (LxDxH)	520 x 740 x 1935 mm		670 x 740 x 1935 mm	
Capacity (gross/net)	353 / 296 Lt	353 / 230 Lt	485 / 385 Lt	485 / 315 Lt
Net weight	108 kg		128 kg	
Refrigeration	Static	Ventilated	Static	Ventilated
Refrigerant	R290			
Climate class	7			
Operating conditions	35 °C / 75% RH			
Product storage temperature	-18 °C	-18 / -16 °C	-18 °C	-18 / -16 °C
Compressor (no. - type)	1 - Hermetic			
Defrost process	Manual	Hot gas	Manual	Hot gas
Power supply voltage	230v / 50hz / 1ph			
Electrical input (nominal)	700 w / 4.0 A	750 w / 3.8 A	850 w / 4.7 A	850 w / 4.7 A
Electrical input (nominal)	-	1060 w / 4.9 A	-	11700 w / 5.0 A

MARIN RS/RV - Glass fronted upright freezer - static or ventilated refrigeration



Taylor UK (a division of HTG Trading Ltd)
 106 Claydon Business Park, Gt. Blakenham,
 Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

*Data for air cooled units. Water cooled and remote installations are available on request.