

# ONESHOW STAND

High visibility free-standing display cabinets



ITEM No. \_\_\_\_\_

## Model options:

GELATO (with standard Napoli or Carapine configurations)

**ONESHOW STAND GELATO RV 120+120**

Chilled PASTRY

**ONESHOW STAND PAS RV 120+120**

Specialist cabinet with humidity control for CHOCOLATE

**ONESHOW STAND CHOC RV 120+120**

## Standard equipment:

Fitting kit for either Napolis or Carapines (Gelato only)

Tray kit (pastry & chocolate only)

Cool white LED lighting 5700 K°

Work top - **Glacier White Corian™**

Front panel - **Alaska White 0030 Fenix™**

Pedestal - **Custom RAL painted**

Side panels - **Alaska White 0030 Fenix™**

Fixed height pedestal

## Optional extras:

5 Lt standard Napoli pan (Polycarbonate)

5 Lt wide Napoli pan (Polycarbonate) (360x250x80h mm)

3 Lt carapine (Polycarbonate) (154x160h mm)

Ice lolly container (250x360x43h mm)

Tray for individual portions (250x360 mm)

Dual temperature function (call for details)

Remote refrigeration installation (call for details)

Front & side panel colours - **White printed glass**  
**Wood finishes**



Model ONESHOW STAND GELATO RV 120+120 with Napoli fitting kit and optional custom panel finish



Model ONESHOW STAND GELATO RV 120+120 with Carapine fitting kit



## Features:

- ◆ OneShow - A showcase that can do everything; gelato, frozen pastry items, ice lolly display, chilled pastries and chocolate.
- ◆ Stratified glass structures are heated to help prevent condensation build up.
- ◆ Available in a range of premium standard finished and wood effects are available on request.
- ◆ Free-standing design for maximum visual impact.



**ENERGY SAVING**  
LED lights + EC fan motor



**REFRIGERATION**  
Ventilated



**DEFROST**  
Reverse cycle - Gelato  
Off cycle - Pastry & Chocolate



**REFRIGERANT**  
R290



**INSTALLATION**  
Plug-In / Remote (optional)



**TEMPERATURE**  
-20 / +2 °C - Gelato  
+1 / +10 °C - Pastry  
+14 / +16 °C - Chocolate



**CLIMATE CLASS**  
4 - Gelato  
3 - Pastry & Chocolate



**ENERGY RATING**  
F - Gelato  
G - Pastry



Sistema di Qualità  
**ISO 9001**  
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità  
**ISO 14001**  
Cert. CIS ECO ISO 9191.ISA3



**Taylor UK**  
Catering Equipment Specialists

**Taylor UK** (a division of HTG Trading Ltd)  
106 Claydon Business Park, Gt. Blakenham,  
Ipswich, Suffolk, IP6 0NL, United Kingdom  
**0800 838 896 - sales@taylor-company.co.uk**  
**www.taylor-company.co.uk**

Due to continual research and development, these specifications are subject to change without notification.

March 2021


ONESHOW STAND - High visibility free-standing display cabinets - 12 flavour

# ONESHOW STAND




## High visibility free-standing display cabinets

Section view: (all dimensions in mm)

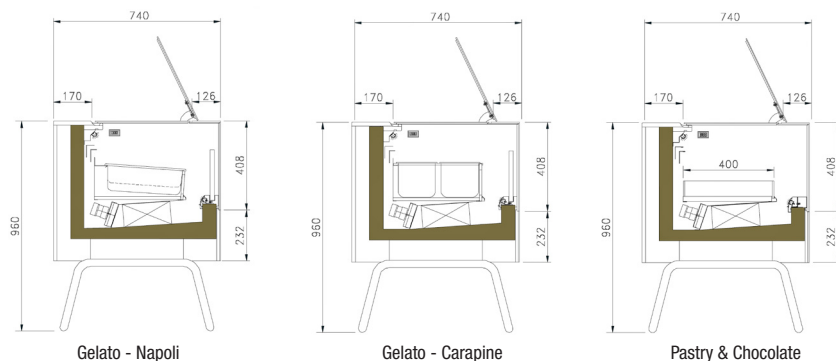

ITEM No. \_\_\_\_\_

### Napoli configuration:




5 Lt (STD Polycarbonate)  
360 x 165 x 120(h) mm

#### Display

Model 120+120

6+6



5/10 Lt (WIDE Polycarbonate)  
360 x 250 x 80(h) mm

#### Display

Model 120+120

4+4

### Carapine configuration:




3 Lt (Polycarbonate)  
154 x 160(h) mm

#### Display


Model 120+120

10+10


### L120+120 Gelato - Napoli

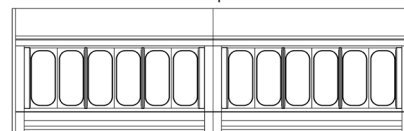

### L120+120 Gelato - Carapine

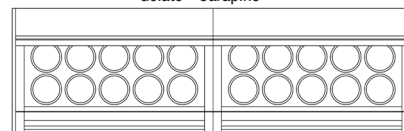

### L120+120 Pastry & Chocolate

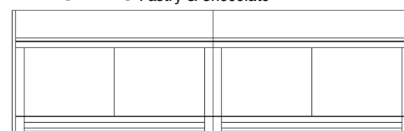

Display area - 1060 x 400 mm

Display area - 1060 x 400 mm

ONESHOW STAND		Model type	Display area m <sup>2</sup>	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H96 GELATO	120+120	IGF1	0.94	G2	-15 °C	F (R290)	72.68	14,235
H96 PASTRY	120+120	IHC7	1.09	H	+6 °C	G (R290)	99.90	2,774

Configuration: air cooled plug-in unit (R290) plexiglass sliding closure, LED lighting

ONESHOW STAND*	GELATO	PASTRY	CHOCOLATE
	RV 120+120	PAS RV 120+120	CHOC RV 120+120
External dimensions (LxDxH)	2360 x 740 x 960 mm		
Net weight	380 kg		
Refrigeration	Ventilated		
Refrigerant	R290		
Climate class	4	3	
Operating conditions	30 °C / 55 %RH	25 °C / 60 %RH	
Operating temperature range	-20 / +2 °C	n/a	n/a
Product storage temperature	-16 / -14 °C	+1 / +10 °C	+14 / +16 °C
Compressor (no. - type)	2 - Hermetic		
Defrost process	Reverse cycle	Off cycle	
Power supply voltage	230v / 50hz / 1ph		
Electrical input (nominal)	2000 w / 10.2 A	1720 w / 10.8 A	1720 w / 10.8 A
Electrical input (defrost)	3400 w / 16.0 A	140 w / 0.8 A	140 w / 0.8 A



ISO 9001  
Cert. CISQ/CSQ 9130.TAIF



ISO 14001  
Cert. CIS ECO ISO 9191.ISA3



ISO 14064



Taylor UK (a division of HTG Trading Ltd)  
106 Claydon Business Park, Gt. Blakenham,  
Ipswich, Suffolk, IP6 0NL, United Kingdom  
0800 838 896 - sales@taylor-company.co.uk  
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

\*Data for air cooled units. Water cooled and remote installations are available on request.