

SUPERCAPRI

Professional ventilated gelato display



Model RV PLUS 220 H117




Model RV PLUS 220 H117



Customisable area:

- Model 120 - 1152 x 440 mm
- Model 170 - 1647 x 440 mm
- Model 220 - 2142 x 440 mm

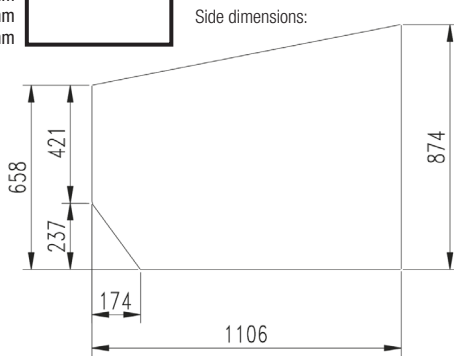

Side dimensions:

ITEM No. _____

Model options:

(PLUS - SINGLE EVAPORATOR, DUAL FRONT AIRFLOW)

- SUPERCAPRI RV PLUS 120
- SUPERCAPRI RV PLUS 170
- SUPERCAPRI RV PLUS 220



PLUS

(PLUS 1 - DUAL EVAPORATOR, SINGLE REAR AIRFLOW)

- SUPERCAPRI RV PLUS 1 120
- SUPERCAPRI RV PLUS 1 170
- SUPERCAPRI RV PLUS 1 220



PLUS 1

(PLUS 2 - DUAL EVAPORATOR, DUAL REAR AIRFLOW)

- SUPERCAPRI RV PLUS 2 120
- SUPERCAPRI RV PLUS 2 170
- SUPERCAPRI RV PLUS 2 220



PLUS 2

ALL models listed above are available either H117 or H135 high

Standard equipment:

- Cool white LED lighting 5700 K°
- Work top - Glacier White Corian™
- Front panel - Grey (RAL7022) lacquered
- Lower front grill - Grey (RAL7022) lacquered
- Side panels - Grey (RAL7022) lacquered
- Plexiglass sliding doors
- Adjustable air deflectors (PLUS 1&2 ONLY)
- Swivel castors with brake & adjustable feet

Optional extras:

- 5 Lt standard Napoli pan (S/S)
- 5 Lt wide Napoli pan (S/S) (360x250x80h mm)
- Cone holder with/without toppings container
- Scoop wash with shower or tap
- Ice lolly container (250x360x43h mm)
- Tray for individual portions (250x360 mm)
- Self rolling night curtain
- Dual temperature function (call for details)
- Remote refrigeration installation (call for details)
- Custom RAL panel colours (call for details)
- Front & side panel colours - White Lacquer (RAL9003)
Black Lacquer (RAL9005)

Features:

- ◆ Supercapri is the synthesis of an essential design and high-level technical features. It is equipped with glass side windows with heated chamber and heatable laminated front glass that can be opened.
- ◆ Supercapri can be set up with three different types of ventilation: PLUS single evaporator with frontal dual airflow; PLUS 1 dual evaporator with single rear air flow; PLUS 2 dual evaporator with dual rear air flow.



ENERGY SAVING
LED lights + EC fan motor



REFRIGERATION
Ventilated



DEFROST
Reverse cycle



REFRIGERANT
R290 - PLUS
R452A - PLUS 1 & PLUS 2



INSTALLATION
Plug-In / Remote (optional)



TEMPERATURE
-20 / +2 °C



CLIMATE CLASS
7 - PLUS
4 - PLUS 1 & PLUS 2



ENERGY RATING
D & E



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK
Catering Equipment Specialists

Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021

SUPERCAPRI - Professional ventilated gelato display - 12/18/24 flavour

SUPERCAPRI



Professional ventilated gelato display




Section view: (all dimensions in mm)

H117

Single evaporator with frontal dual airflow
PLUS Display inclination 11°


Dual evaporator with single rear airflow
PLUS 1 Display inclination 3°

Dual evaporator with dual rear airflow
PLUS 2 Display inclination 0°



ITEM No. _____

Napoli configuration:




5 Lt (STD)
360 x 165 x 120(h) mm

Display

Model 120
Model 170
Model 220

12
18
24



5/10 Lt (WIDE)
360 x 250 x 80/120(h) mm

Display

Model 120
Model 170
Model 220




8
12
16

SUPERCAPRI		Model type	Display area m ²	Temp class	Reccom. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H117 PLUS	120	IGF1	0.71	G2	-15 °C	D (R290)	45.68	7,781
	170	IGF1	1.07	G2	-15 °C	D (R290)	49.33	10,353
	220	IGF1	1.43	G2	-15 °C	D (R290)	49.65	12,384
H1135 PLUS	120	IGF1	0.71	G2	-15 °C	D (R290)	47.61	8,110
	170	IGF1	1.07	G2	-15 °C	E (R290)	51.52	10,813
	220	IGF1	1.43	G2	-15 °C	E (R290)	52.02	12,976
H117 PLUS 1 PLUS 2	120	IGF1	0.71	G2	-15 °C	E (R452A)	50.55	8,611
	170	IGF1	1.07	G2	-15 °C	E (R452A)	54.58	11,456
	220	IGF1	1.43	G2	-15 °C	E (R452A)	54.94	13,704
H135 PLUS 1 PLUS 2	120	IGF1	0.71	G2	-15 °C	E (R452A)	52.68	8,974
	170	IGF1	1.07	G2	-15 °C	E (R452A)	57.01	11,965
	220	IGF1	1.43	G2	-15 °C	E (R452A)	57.56	14,358

Configuration: air cooled plug-in unit (R452A or R290) plexiglass sliding door closure, LED lighting

SUPERCAPRI*	RV 120	RV 170	RV 220
External dimensions (LxDxH) H117	1187 x 1110 x 1175 mm	1682 x 1110 x 1175 mm	2177 x 1110 x 1175 mm
External dimensions (LxDxH) H135	1187 x 1110 x 1352 mm	1682 x 1110 x 1352 mm	2177 x 1110 x 1352 mm
Net weight H117	320 kg	409 kg	510 kg
Net weight H135	346 kg	434 kg	535 kg
Refrigeration	Ventilated		
Refrigerant	R290 PLUS ONLY (R452A PLUS 1 & 2)		
Climate class - PLUS	7		
Climate class - PLUS 1 & 2	4		
Operating conditions - PLUS	35 °C / 75 %RH		
Operating conditions - PLUS 1 & 2	30 °C / 55 %RH		
Operating temperature range	-20 / +2 °C		
Product storage temperature	-16 / -14 °C		
Compressor (no. - type)	1 - Hermetic	2 - Hermetic	
Defrost process	Reverse cycle		
Power supply voltage	230v / 50hz / 1ph	400v / 50hz / 3ph	
Electrical input (nominal)	1240 w / 6.0 A	1720 w / 3.0 A	2700 w / 4.2 A
Electrical input (defrost)	2300 w / 11.0 A	2950 w / 4.9 A	6300 w / 8.5 A

H135



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Due to continual research and development, these specifications are subject to change without notification.

*Data for air cooled units. Water cooled and remote installations are available on request.

SUPERCAPRI DUAL ZONE



Twin zone professional gelato display

ITEM No. _____

Model options:

(PLUS - SINGLE EVAPORATOR, DUAL FRONT AIRFLOW)

- SUPERCAPRI RV PLUS 120+50
- SUPERCAPRI RV PLUS 170+50



ALL models listed above are available either H117 or H135 high

Standard equipment:

- Cool white LED lighting 5700 K°
- Work top - Glacier White Corian™
- Front panel - Grey (RAL7022) lacquered
- Lower front grill - Grey (RAL7022) lacquered
- Side panels - Grey (RAL7022) lacquered
- Plexiglass sliding doors
- Swivel castors with brake & adjustable feet

Optional extras:

- 5 Lt standard Napoli pan (S/S)
- 5 Lt wide Napoli pan (S/S) (360x250x80h mm)
- Cone holder with/without toppings container
- Scoop wash with shower or tap
- Ice lolly container (250x360x43h mm)
- Tray for individual portions (250x360 mm)
- Self rolling night curtain
- Remote refrigeration installation (call for details)
- Custom RAL panel colours (call for details)
- Front & side panel colours - White Lacquer (RAL9003)
Black Lacquer (RAL9005)



Model RV PLUS 170+50 H117




Model RV PLUS 170+50 H117




Customisable area:

- Model 120+50 - 1647 x 440 mm
- Model 170+50 - 2142 x 440 mm



Side dimensions:

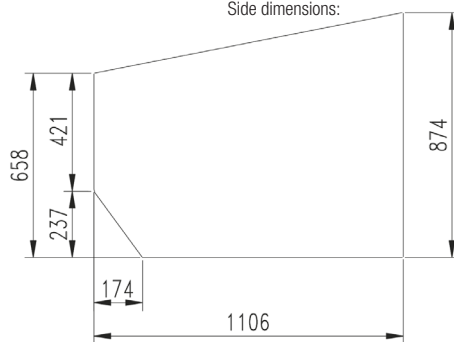

Features:

- ◆ Supercapri is the synthesis of an essential design and high-level technical features. It is equipped with glass side windows with heated chamber and heatable laminated front glass that can be opened.
- ◆ Supercapri dual zone cabinets are only available with PLUS single evaporator with frontal dual airflow.
- ◆ Dual zone allows two different products to be displayed at two different temperatures.



ENERGY SAVING
LED lights + EC fan motor



REFRIGERATION
Ventilated



DEFROST
Reverse cycle



REFRIGERANT
R290



INSTALLATION
Plug-In / Remote (optional)



TEMPERATURE
-20 / +2 °C



CLIMATE CLASS
7 - PLUS



ENERGY RATING
D & E



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021

SUPERCAPRI DUAL ZONE - Twin zone professional gelato display - 18/24 flavour


SUPERCAPRI DUAL ZONE




Twin zone professional gelato display

Section view: (all dimensions in mm)

H117




H135



ITEM No. _____


Napoli configuration:



5 Lt (STD)
360 x 165 x 120(h) mm

Display

Model 120+50 6+12
Model 170+50 6+18



5/10 Lt (WIDE)
360 x 250 x 80/120(h) mm

Display

Model 120+50 4+8
Model 170+50 4+12

SUPERCAPRI - Dual Zone		Model type	Display area m ²	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H117 PLUS	120+50	IGF1	1.07	G2	-15 °C	D (R290)	49.33	10,353
	170+50	IGF1	1.43	G2	-15 °C	D (R290)	49.65	12,384
H135 PLUS	120+50	IGF1	1.07	G2	-15 °C	E (R290)	51.52	10,813
	170+50	IGF1	1.43	G2	-15 °C	E (R290)	52.02	12,976

Configuration: air cooled plug-in unit (R290) plexiglass sliding door closure, LED lighting

SUPERCAPRI DUAL ZONE*	RV 170	RV 220
External dimensions (LxDxH) H117	1682 x 1110 x 1175 mm	2177 x 1110 x 1175 mm
External dimensions (LxDxH) H135	1682 x 1110 x 1352 mm	2177 x 1110 x 1352 mm
Net weight H117	409 kg	510 kg
Net weight H135	434 kg	535 kg
Refrigeration	Ventilated	
Refrigerant	R290	
Climate class - PLUS	7	
Operating conditions - PLUS	35 °C / 75 %RH	
Operating temperature range	-20 / +2 °C Dual Zone	
Product storage temperature	-16 / -14 °C Dual Zone	
Compressor (no. - type)	2 - Hermetic	
Defrost process	Reverse cycle	
Power supply voltage	400v / 50hz / 3ph	
Electrical input (nominal)	1720 w / 3.0 A	2700 w / 4.2 A
Electrical input (defrost)	2950 w / 4.9 A	6300 w / 8.5 A

Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk



Due to continual research and development, these specifications are subject to change without notification.



ISO 9001
Cert. CISQ/CSQ 9130.TAIF



ISO 14001
Cert. CIS ECO ISO 9191.ISA3



*Data for air cooled units. Water cooled and remote installations are available on request.