

SUPERSHOW PASTRY



Pastry display with all round visibility



Model PAS RV 220 H135

ITEM No. _____

Model options:

- SUPERSHOW PAS RV 120
- SUPERSHOW PAS RV 170
- SUPERSHOW PAS RV 220

ALL models listed above are available either H117 or H135 high

Standard equipment:

- Cool white LED lighting 5700 K°
- Work top - **Glacier White Corian™**
- Front panel - **White (RAL9003) lacquered**
- Lower front grill - **Black (RAL9005)**
- Side panels - **White (RAL9003) lacquered**
- Ambient shelf(s) - 1 on H117, 2 on H135
- Internal display surface - **Stainless steel**
- Plexiglass sliding doors
- Swivel castors with brake & adjustable feet

Optional extras:

- Remote refrigeration installation (call for details)
- Custom RAL panel colours (call for details)
- Front grill panel colours - **Black (RAL9005) lacquer**

Features:

- ◆ Supershow Pastry is a display cabinet providing a 3D visibility thanks to its transparent structure. The front lighting further enhances the pastry display.
- ◆ Ventilated refrigeration with horizontal finned evaporator provide uniformity of temperature. Automatic reverse defrosting cycle.
- ◆ One piece body with ecological polyurethane insulation (HCFC & HFC free), foamed with CO2 - 60 mm thick.
- ◆ Display base and service top is finished in bright stainless steel, rear panel finished in painted sheet with epoxy powder coating. Side panels in bright stainless steel.
- ◆ Tempered glass with heating and tilt-down front glass opening, LED lighting and polycarbonate sliding doors on the operator side.
- ◆ Available in two different heights (H117, H135), this pastry display cabinet represents a true stage upon which any artisanal pastry product can be brought to life!



ENERGY SAVING
LED lights + EC fan motor



REFRIGERATION
Ventilated



DEFROST
Off cycle



REFRIGERANT
R452A



INSTALLATION
Plug-In / Remote (optional)



TEMPERATURE
+1 / +10 °C



CLIMATE CLASS
3



ENERGY RATING
E



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021

SUPERSHOW PASTRY - Pastry display with all round visibility

SUPERSHOW PASTRY




Pastry display with all round visibility

Section view: (all dimensions in mm)

ITEM No. _____


H117

1M: single shelf

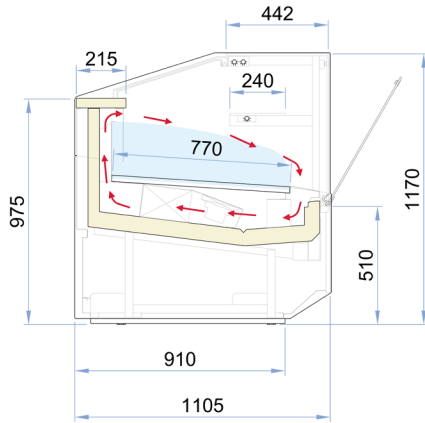

H135

2M: two shelves

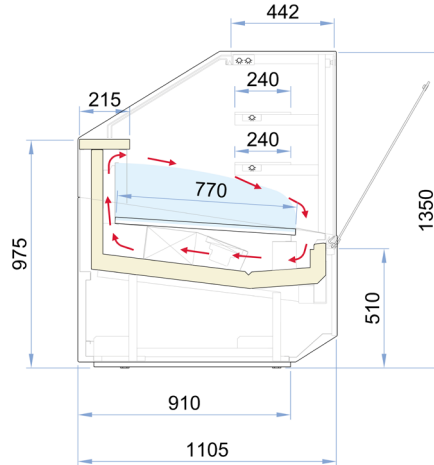

SUPERSHOW - PAS		Model type	Display area m ²	Temp class	Reccom. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H117	120	IVC4	1.06	M1	+2 °C	E (R452A)	53.06	4,604
	170	IVC4	1.49	M1	+2 °C	E (R452A)	53.36	5,591
	220	IVC4	1.92	M1	+2 °C	E (R452A)	54.90	6,742
H135	120	IVC4	1.06	M1	+2 °C	E (R452A)	53.06	4,604
	170	IVC4	1.49	M1	+2 °C	E (R452A)	53.36	5,591
	220	IVC4	1.92	M1	+2 °C	E (R452A)	54.90	6,742

Configuration: air cooled plug-in unit (R452A) self rolling curtain closure, LED lighting, illuminated shelves

SUPERSHOW PAS*	RV 120	RV 170	RV 220
External dimensions (LxDxH) H117	1187x 1105 x 1170 mm	1682 x 1105 x 1170 mm	2177 x 1105 x 1170 mm
External dimensions (LxDxH) H135	1187 x 1105 x 1350 mm	1682 x 1105 x 1350 mm	2177 x 1105 x 1350 mm
Net weight H117	320 kg	380 kg	410 kg
Net weight H135	331 kg	390 kg	419 kg
Refrigeration	Ventilated		
Refrigerant	R452A		
Climate class	3		
Operating conditions	25 °C / 60 %RH		
Product storage temperature	+1 / +10 °C		
Compressor (no. - type)	1 - Hermetic		
Defrost process	Off cycle		
Power supply voltage	230v / 50hz / 1ph		
Electrical input (nominal)	690w / 6.0 A	840 w / 7.0 A	1230 w / 9.0 A
Electrical input (defrost)	200 w / 3.0 A	230 w / 3.0 A	370 w / 4.0 A



ISO 9001
Cert. CISQ/CSQ 9130.TA1F



ISO 14001
Cert. CIS ECO ISO 9191.ISA3



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

*Data for air cooled units. Water cooled and remote installations are available on request.