

# METRO ST SELF

Grab & Go open front display - chilled



Model ST SELF RV TN H135 - 100



Model ST SELF RV TN H117 - 100

ITEM No. \_\_\_\_\_

**Model options:**

- (RV TN = VENTILATED CHILLED REFRIGERATION)
- METRO ST SELF RV TN - 100
- METRO ST SELF RV TN - 130
- METRO ST SELF RV TN - 150

ALL models are available either H117 or H135 high

**Standard equipment:**

- H117 - TWO refrigerated glass shelves
- H135 - THREE refrigerated glass shelves
- Stainless steel shelf supports
- LED lighting 3000 K
- Front panel - Bianco RAL 9003
- Side panels - Bianco RAL 9003
- Adjustable feet
- Glass rear sliding doors

**Optional extras:**

- Wheel kit with swivel casters and brake
- Clear methacrylate shelf supports
- 4000 or 5700 K LED lighting
- Custom panel colours - Any RAL colour (call for details)

**Features:**

- ◆ Chilled - Display case with ventilated refrigeration and automatic defrost by stopping the compressor, negative/positive temperature -1°C/+7°C in the SELF making it ideal for fresh pre-packed products, pastry and beverages.
- ◆ There is a night-time closure curtain: integrated in the front part of the upper glass panel to reduce consumption.
- ◆ The operators side is closed by insulating glass doors and a PVC sheet which slide on wheels with bearings. The sliding doors increase the load capacity while reducing the footprint of the display case: a series of benefits which simplify daily use, making it more efficient.
- ◆ Easy cleaning - The inside of the case has a display surface divided into two parts that can be easily removed to facilitate daily and unscheduled cleaning. The enlarged 1-inch drain hole and siphon prevent contamination from external odours.



**ENERGY SAVING**  
LED lights + EC fan motor



**REFRIGERATION**  
Ventilated



**DEFROST**  
Off cycle



**REFRIGERANT**  
R290



**INSTALLATION**  
Plug-In / Remote (optional)



**TEMPERATURE**  
-1 / +7 °C



**CLIMATE CLASS**  
3



**ENERGY RATING**  
D



Sistema di Qualità  
**ISO 9001**  
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità  
**ISO 14001**  
Cert. CIS ECO ISO 9191.ISA3

**aria** ISO 14064



**Taylor UK**  
Catering Equipment Specialists

**Taylor UK** (a division of HTG Trading Ltd)  
106 Claydon Business Park, Gt. Blakenham,  
Ipswich, Suffolk, IP6 0NL, United Kingdom  
**0800 838 896 - sales@taylor-company.co.uk**  
**www.taylor-company.co.uk**

Due to continual research and development, these specifications are subject to change without notification.

March 2021

METRO ST SELF - Grab & Go open front display - chilled

# METRO ST SELF





ITEM No. \_\_\_\_\_



## Grab & Go open front display - chilled

Section view: (all dimensions in mm)

H117 - RV TN  
CHILLED



H135 - RV TN  
CHILLED

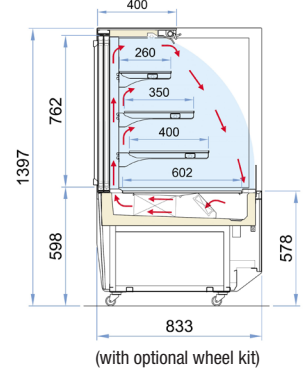

METRO ST SELF		Model type	Display area m <sup>2</sup>	Temp class	Recomm. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H117	100	IVC4	2.53	M2	+4 °C	D (R290)	15.30	2,263
	130	IVC4	3.08	M2	+4 °C	D (R290)	15.30	2,628
	150	IVC4	3.44	M2	+4 °C	D (R290)	15.70	2,931
H135	100	IVC4	2.20	M2	+4 °C	D (R290)	39.1	4,574
	130	IVC4	2.72	M2	+4 °C	D (R290)	37.3	5,074
	150	IVC4	3.07	M2	+4 °C	D (R290)	38.00	5,659

Configuration: air cooled plug-in unit (R290) double glass sliding doors closure, LED lighting, illuminated shelves

METRO ST SELF*	RV TN 100	RV TN 130	RV TN 150
External dimensions H117 (LxDxH)	1000 x 833 x 1170 (1216 with wheels) mm	1300 x 833 x 1170 (1216 with wheels) mm	1500 x 833 x 1170 (1216 with wheels) mm
External dimensions H135 (LxDxH)	1000 x 833 x 1350 (1397 with wheels) mm	1300 x 833 x 1350 (1397 with wheels) mm	1500 x 833 x 1350 (1397 with wheels) mm
Capacity (gross/net) H117	410 / 105.8 Lt	538 / 258.1 Lt	632 / 263 Lt
H135	501.1 / 264.6 Lt	658 / 347.2 Lt	769 / 301 Lt
Net weight H117 / H135	200 / 210 kg	205 / 215 kg	223 / 233 kg
Refrigeration	Ventilated		
Refrigerant	R290		
Climate class	3		
Operating conditions	25 °C / 60 %RH		
Product storage temperature	-1 / +7 °C		
Compressor (no. - type)	1 - Hermetic		
Defrost process	Stop compressor - off cycle		
Power supply voltage	230v / 50hz / 1ph		
Electrical input (nominal)	850 w / 3.9 A	910 w / 4.1 A	1020 W / 5.2 A
Electrical input (defrost)	60 w / 0.3 A		

**Taylor UK** (a division of HTG Trading Ltd)  
 106 Claydon Business Park, Gt. Blakenham,  
 Ipswich, Suffolk, IP6 ONL, United Kingdom  
**0800 838 896 - sales@taylor-company.co.uk**  
**www.taylor-company.co.uk**

Due to continual research and development, these specifications are subject to change without notification.

METRO ST SELF - Grab & Go open front display - chilled

\*Data for air cooled units. Water cooled and remote installations are available on request.