Lincat Combi Ovens



LCS110I - Lincat CombiSlim 1.10 Electric Counter-top Combi Oven - Injection - W 513 mm - 12.7kW Gain maximum flexibility using minimum space with CombiSlim ovens.

- Gain maximum flexibility using minimum space with CombiSlim ovens. These combi ovens measure only 51.3 cm in width and fit into all professional kitchens
- CombiSlim ovens are ideal for small-scale food production in take-away shops, cafés, etc
- Intuitive touch display SmartTouch® for programming
- 1/1GN compatible

- Steam injection, with CombiSmart® humidity control
- Ability to create cooking programmes with up 15 steps
- Rack timer allowing accurate cooking times for different items on different shelves
- Two-step safety handle

400

2.5-7

3/4"

DN 40 mm

Specifications

Net Weight Kg

Range Lincat Combi Ovens Temperature Range °C 30-300 Series Combi Slim IP Rating IPX4 Power Type Electric Temperature Control Electronic Unit Type Counter-top Oven Rating kW Steam connection = N/A:Hot air connection = 12.7 UK Warranty 2 Years Parts and Labour Warranty GTIN 5056105120605 Key Specifications Capacity WRAS Approved Yes Gastronorm Capacity 10 x GN1/1 Type of Lighting Halogen Portions per Day 90 Number of Grids included 0 Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Summary		Power and Performance	
Series CombiSlim IP Rating IPX4 Power Type Electric Temperature Control Electronic Unit Type Counter-top Oven Rating kW Ves Steam connection = N/A:Hot air connection = 12.7 WRAS Approved Yes Gastronorm Capacity 10 x GNI/I Type of Lighting Halogen Portions per Day 90 Number of Grids included 0 Weights and Dimensions Unit Height (External) mm 948 Unit Weight (External) mm 811 Unit Depth (External) mm 811 Height (Internal) mm 400 Weights Mating Watts 12,700	Brand	Lincat	Total Power kW	12.7
Power Type Electric Unit Type Counter-top Available in UK Only Ves UK Warranty GTIN Steam connection = N/A;Hot air connection = 12.7 Capacity WRAS Approved Type of Lighting Number of Grids included Weights and Dimensions Unit Height (External) mm Unit Width (External) mm Halogen 948 Requires Installation Requires Electrical Supply WK3 Pin Plug Nu Height (Internal) mm Halogen Halogen Halogen Halogen Portions per Day Weights Approved Unit Height (External) mm Halogen	Range	Lincat Combi Ovens	Temperature Range °C	30-300
Unit Type Counter-top Available in UK Only Yes 2 Years Parts and Labour Warranty 5056105120605	Series	CombiSlim	IP Rating	IPX4
Available in UK Only Yes UK Warranty GTIN 5056105120605 Capacity WRAS Approved Yes Gastronorm Capacity Type of Lighting Number of Grids included Weights and Dimensions Unit Height (External) mm 948 Requires Installation Whith (External) mm 948 Requires Electrical Supply With (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Power Type	Electric	Temperature Control	Electronic
Available in UK Only UK Warranty GTIN 2 Years Parts and Labour Warranty GTIN Capacity WRAS Approved Yes Gastronorm Capacity 10 x GN1/1 Type of Lighting Number of Grids included 0 Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Unit Width (External) mm 513 Requires Electrical Supply Vis Pes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Unit Type	Counter-top	Oven Bating kW	Steam connection = N/A;Hot air
Key Specifications Capacity WRAS Approved Yes Gastronorm Capacity Portions per Day Number of Grids included Veights and Dimensions Unit Height (External) mm 948 Requires Installation Unit Width (External) mm 513 Requires Electrical Supply VK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Available in UK Only	Yes	Oven Rating KW	connection = 12.7
Key Specifications Yes Gastronorm Capacity 10 x GN1/1 Type of Lighting Halogen Portions per Day 90 Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	UK Warranty	2 Years Parts and Labour Warranty		
WRAS Approved Type of Lighting Halogen Number of Grids included Weights and Dimensions Unit Height (External) mm 948 Requires Installation Fees Unit Width (External) mm 513 Requires Electrical Supply Fees Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Fees Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	GTIN	5056105120605		
Type of Lighting Halogen 0 Number of Grids included 0 Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Key Specifications		Capacity	
Number of Grids included 0 Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	WRAS Approved	Yes	Gastronorm Capacity	10 x GN1/1
Weights and Dimensions Supply Connections Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Type of Lighting	Halogen	Portions per Day	90
Unit Height (External) mm 948 Requires Installation Yes Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Number of Grids included	0		
Unit Width (External) mm 513 Requires Electrical Supply Yes Unit Depth (External) mm 811 UK 3 Pin Plug No Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Weights and Dimensions		Supply Connections	
Unit Depth (External) mm811UK 3 Pin PlugNoHeight (Internal) mm550Requires HardwiringYesWidth (Internal) mm400Electrical Supply Rating Watts12,700	Unit Height (External) mm	948	Requires Installation	Yes
Height (Internal) mm 550 Requires Hardwiring Yes Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Unit Width (External) mm	513	Requires Electrical Supply	Yes
Width (Internal) mm 400 Electrical Supply Rating Watts 12,700	Unit Depth (External) mm	811	UK 3 Pin Plug	No
	Height (Internal) mm	550	Requires Hardwiring	Yes
Depth (Internal) mm 630 Three Phase Amps L1=21.0; L2=21.0; L3=21.0	Width (Internal) mm	400	Electrical Supply Rating Watts	12,700
	Depth (Internal) mm	630	Three Phase Amps	L1=21.0; L2=21.0; L3=21.0

Three Phase Voltage

Drain Connection

Water Connection

Water Connection Pressure Bar



Lincat Combi Ovens

Print Date: 02/07/2021

Shipping

Packed Weight Kg 89.1 Packed Height cm 110 Packed Width cm 60 Packed Depth cm

Available Options

INSTALLATION

LCO2001 Site Survey & Installation

COMMISSIONING

LCO3001 Commissioning

R/H DOOR INSTALL

LCC1003

LCC1004

LCC2003

LCC2005

LCC2006

Product Code: LCS1101

1.06/1.10

in hard water areas

Lincat Protect Intense Detergent - 2 x 5I

Lincat Protect Rinse Aid - 2 x 5l

LCO2002 Right Hinged Door Installation


Available Accessories			
LCA1013LR	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for CombiSlim 1.06 on 1.06		
LCA1014LR	Lincat Combi Oven CombiPlus Stacking Kit and Low Floor Stand - for CombiSlim 1.06 on 1.10		
LCA3003	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 20 mm deep		
LCA3005	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 40 mm deep		
LCA3007	Lincat Combi Oven Imperial Non-stick Container - GN1/1 (325 x 530 mm) - 60 mm deep		
LCA3009	Lincat Combi Oven Imperial Pizza and Grilling Sheet - GN1/1(325 x 530 mm)		
LCA3011	Lincat Combi Oven Imperial Grilling Grid - GN1/1 (325 x 530 mm)		
LCA3012	Lincat Combi Oven Imperial Potato Grid - GN1/1(325 x 530 mm) - 28 Potato Capacity		
LCA3013	Lincat Combi Oven Imperial Multi-tray - 8 Moulds - GN1/1 (325 x 530 mm)		
LCA3015	Lincat Combi Oven Non-stick Aluminium Baking Sheet - GN1/1 (325 x 530 mm)		
LCA3017	Lincat Combi Oven Non-stick Perforated Aluminium Baking Sheet - GN1/1 (325 x 530 mm)		
LCA3019	Lincat Combi Oven Silicone Baking Mat - GN1/1(325 x 530 mm)		
LCA3021	Lincat Combi Oven Steamfry Basket - GN1/1(325 x 530 mm)		
LCA3023	Lincat Combi Oven Rack for Spare Ribs - GN1/1 (325 x 530 mm)		
LCA3024	Lincat Combi Oven Chicken Grid - GN1/2 (325 x 265 mm) - 4 Chicken Capacity		
LCA3025	Lincat Combi Oven Chicken Grid - GN1/1(325 x 530 mm) - 8 Chicken Capacity		
LCA4001	Lincat Combi Oven Software Key - Quick Select Recipes (QSR)		
LCA4002	Lincat Combi Oven Software Key - Advanced Rack Timer - Tailored Menu Handling		
LCA5003	Lincat Combi Oven Condenser Hood - for CombiSlim Models		
LCA6006	Lincat Combi Oven Static Stand for CombiSlim - Open Stand		
LCC1001	Hydro Shield 3600 (L) Water Filter Cartridge - Recommended for CombiSlim and Visual Cooking 1.06/1.10		
LCC1002	Hydro Shield 6000 (XL) Water Filter Cartridge - Recommended for Visual Cooking 1.20/2.06/2.10/2.20 and all Combi Ovens in hard water areas		


Lincat Protect Cleaning Package – 6×5 l Intense Detergent and 2×5 l Rinse Aid

Hydro Shield 3600 (L) Water Filter Kit - Including Filter, Filter Head and Hose - Recommended for CombiSlim and Visual Cooking

 $Hydro\ Shield\ 6000\ (XL)\ Water\ Filter\ Kit-Including\ Filter,\ Filter\ Head\ and\ Hose-Recommended\ for\ 1.20/2.06/2.10/2.20+all\ Ovens$

Technical Picture

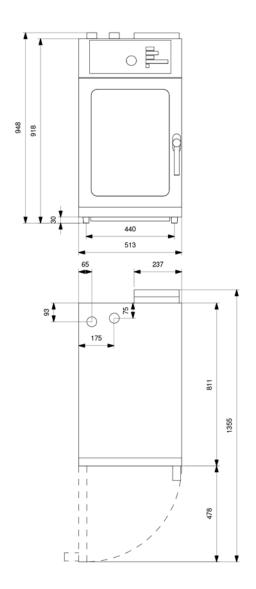

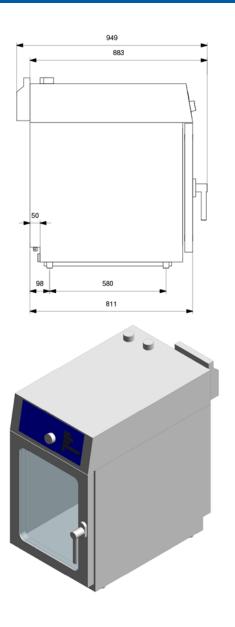



Lincat Limited

Whisby Road,

Lincoln, LN6 3QZ,

United Kingdom

Company No: 2175448

A member company of

Customer Care

Tel: +44 1522 875500

Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536

Email: export@lincat.co.uk

Opening Hours

Monday - Friday:

8.30am - 5pm