

ISA REFRIGERATED DISPLAYS IMPORTANT INFORMATION



DAILY

- ◆ **DO** - Clean and sanitise all serving areas and work surfaces with a suitable food-safe sanitiser and a soft cloth. Avoid using any abrasive cleaners or cloths as these will scratch any shiny or plastic surfaces.
- ◆ **DO** - Make sure that any sliding closures or night curtains are put in place when the cabinet is not being used or at quieter times. This helps maintain even temperatures in the cabinet, can help reduce humidity and condensation build up and will help prevent any foreign bodies contaminating the products on display.
- ◆ **DO NOT** - Leave any scoops or paddles in the cabinet overnight. These should be cleaned and sanitised at least on a daily basis.
- ◆ **DO NOT** - Block any air vents, ensure that there is adequate airflow around the cabinet to provide sufficient cooling. Cabinets require at least 10cm of unrestricted airflow at the front and rear of the unit.
- ◆ **DO NOT** - Spray any liquids directly at any of the electronic controls or through any vents or louvres on the cabinet.



WEEKLY


- ◆ **DO** - Remove all of your products or Napoli containers from the display and store these in an alternative fridge/freezer overnight.
- ◆ **DO** - **Switch OFF** the display cabinet at the main power switch and leave the cabinet to **FULLY DEFROST** overnight. This allows any ice which may have formed on the evaporator to melt. Failure to do this will lead to excessive ice formation which in turn will reduce the airflow around the cabinet causing the temperature to fluctuate, possibly damaging your product and the cabinet.
- ◆ **DO** - Clean and sanitise the internal surfaces of the display cabinet with a suitable food-safe sanitiser and a soft cloth. Avoid using any abrasive cleaners or cloths as these can scratch shiny or plastic surfaces.
- ◆ **DO NOT** - Use excessive amounts of water when cleaning the inside of the display as it will leak through the base of the cabinet potentially damaging components or the floor on which the cabinet stands.
**Failure to fully defrost your refrigerated display cabinet at least once every seven days may result in premature component failure and will result in a non-warranty service call.*



**SWITCH OFF AND FULLY DEFROST
ONCE EVERY 7 DAYS**

MONTHLY

- ◆ **DO** - Remove any air filters and wash these in the sink to remove any dust or debris build up. Ensure the filter is dry before re-installing.
- ◆ **DO** - Use a vacuum cleaner to remove any dust or debris from the areas around the air vents and if it's accessible, vacuum away any dust which may have accumulated on the condenser fins.
- ◆ **DO** - Visually check that none of the air vents are obstructed by packaging etc. which might be being stored in or around the cabinet.

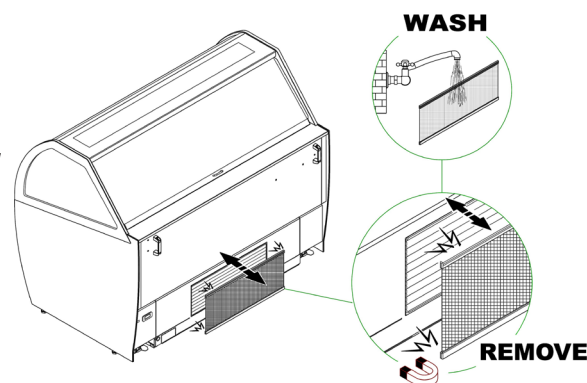

**CLEAN AIR FILTERS AT LEAST
ONCE A MONTH**