# **BERMUDA** VIEW



### Promotional gelato display with increased visibility



ITEM No.

#### Model options:

□BERMUDA VIEW LX RV TB 10 □BERMUDA VIEW LX RV TB 13

#### Standard equipment:


Cool white LED lighting 5700 K Side panel - White (RAL9003) Front panel - White (RAL9003) Work top - Grey (RAL9006) Swivel castors with brake Self rolling night curtain

#### Optional extras:

☐5 Lt standard Napoli pan (S/S)

■White cone holder

□Scoop wash (S/S)

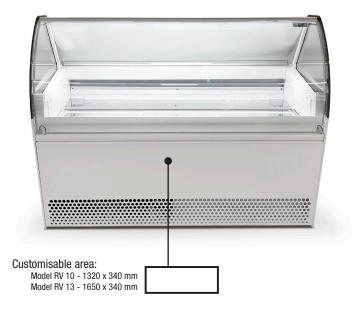

#### Features:

- ◆Gelato display cabinet with ventilated refrigeration system and hot gas automatic defrost.
- ◆Climate friendly R290 Propane refrigerant.
- ◆Bulit-in refrigerated storage cell for 4 (mod.10) or 6 (mod.13) standard 5ltr Napoli containers.
- ◆Body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with CO2.
- ◆Interior and exterior in painted sheet steel; external aesthetic side panels in stratified wood.
- •Glass structure with low emission and tempered glass; curved front glass shape and LED lighting.
- Closure on operators side with night curtain.
- Hermetic condensing unit with electronic control board.
- Structure in powder coated carbon steel.



**ENERGY SAVING** LED lights



INSTALLATION Plug-In



REFRIGERATION Ventilated



**TEMPERATURE** -16 / -14 °C

ISO 14064



**DEFROST** Hot gas





REFRIGERANT R290











Taylor UK (a division of HTG Trading Ltd) 106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom

0800 838 896 - sales@taylor-company.co.uk www.taylor-company.co.uk


Due to continual research and development, these specifications are subject to change without notification.


## **BERMUDA** VIEV



### Promotional gelato display with increased visibility

Section view: (all dimensions in mm)





| BERMUDA VIEW |        | Model<br>type | Display<br>area | Temp<br>class | Reccom.<br>temp | Energy<br>class | Energy<br>Efficiency | Annual<br>Energy |
|--------------|--------|---------------|-----------------|---------------|-----------------|-----------------|----------------------|------------------|
| Height       | Length | туро          | m <sup>2</sup>  | oluoo         | °C              | oluoo           | Index                | kWh/A            |
| H134         | 134    | IGF2          | 0.65            | G2            | -15 °C          | E (R290)        | 50.40                | 8,213            |
|              | 167    | IGF2          | 0.84            | G2            | -15 °C          | D (R290)        | 45.10                | 8,322            |

Configuration: air cooled plug-in unit (R290) polycarbonate tilting panel closure, LED lighting

| BERMUDA VIEW*               | RV TB 10             | RV TB 13             |  |  |  |
|-----------------------------|----------------------|----------------------|--|--|--|
| External dimensions (LxDxH) | 1340 x 814 x 1354 mm | 1670 x 814 x 1354 mm |  |  |  |
| Capacity (gross/net)        | 300 / 255 Lt         | 395 / 325 Lt         |  |  |  |
| Net weight                  | 195 kg               | 235 kg               |  |  |  |
| Refrigeration               | Ventilated           |                      |  |  |  |
| Refrigerant                 | R290                 |                      |  |  |  |
| Climate class               | 7                    |                      |  |  |  |
| Operating conditions        | 35 °C / 75 %RH       |                      |  |  |  |
| Product storage temperature | -16 / -14 °C         |                      |  |  |  |
| Compressor (no type)        | 2 - Hermetic         |                      |  |  |  |
| Defrost process             | Hot gas              |                      |  |  |  |
| Power supply voltage        | 230v / 50hz / 1ph    |                      |  |  |  |
| Electrical input (nominal)  | 1250 w / 5.8 A       | 1600 w / 8.0 A       |  |  |  |
| Electrical input (defrost)  | 1360 w / 6.6 A       | 2000 w / 10.0 A      |  |  |  |







ISO 14064



Taylor UK (a division of HTG Trading Ltd) 106 Claydon Business Park, Gt. Blakenham, Ipswich, Suffolk, IP6 ONL, United Kingdom

0800 838 896 - sales@taylor-company.co.uk www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.