

BERMUDA VIEW



Promotional gelato display with increased visibility

ITEM No. _____

Model options:

- BERMUDA VIEW RV 10
- BERMUDA VIEW RV 13

Standard equipment:

- Cool white LED lighting 5700 K°
- Side panel - **White** (RAL9003)
- Front panel - **White** (RAL9003)
- Work top - **Grey** (RAL9006)
- Swivel castors with brake
- Self rolling night curtain

Optional extras:

- 5 ltr standard napoli (S/S)
- White cone holder
- Scoop wash (S/S)




Model RV 10



Customisable area:

- Model RV 10 - 1320 x 340 mm
- Model RV 13 - 1650 x 340 mm



Features:

- ◆ Gelato display cabinet with ventilated refrigeration system and hot gas automatic defrost.
- ◆ Climate friendly R290 Propane refrigerant.
- ◆ Built-in refrigerated storage cell for 4 (mod.10) Or 6 (mod.13) standard 5ltr Napoli containers.
- ◆ Body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with CO2.
- ◆ Interior and exterior in painted sheet steel; external aesthetic side panels in stratified wood.
- ◆ Glass structure with low emission and tempered glass; curved front glass shape and LED lighting.
- ◆ Closure on operators side with night curtain.
- ◆ Hermetic condensing unit with electronic control board.
- ◆ Structure in powder coated carbon steel.



ENERGY SAVING
LED lights



REFRIGERATION
Ventilated



DEFROST
Hot gas



REFRIGERANT
R290 Propane



INSTALLATION
Plug-In



TEMPERATURE
-16 / -14°C



CLIMATE CLASS
7



Sistema di Qualità
ISO 9001
Cert. CISQ/CSQ 9130.TAIF



Sistema di Qualità
ISO 14001
Cert. CIS ECO ISO 9191.ISA3



ISO 14064



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - June 2019


BERMUDA VIEW - Promotional gelato display with increased visibility - 10/13 flavour

BERMUDA VIEW




Promotional gelato display with increased visibility

Section view: (all dimensions in mm)

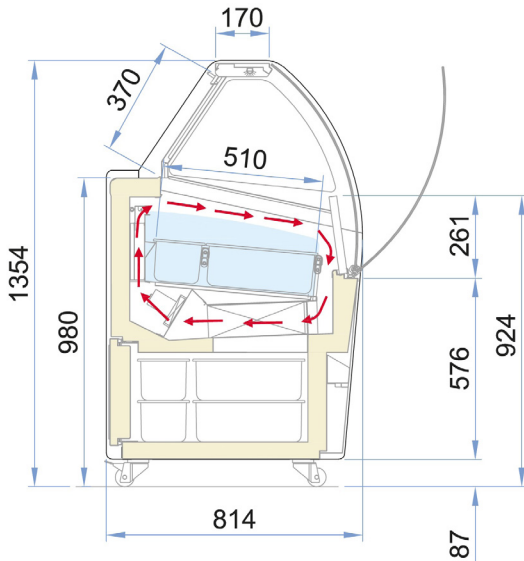

ITEM No. _____

Napoli configuration:



5 ltr (STD)
360 x 165 x 120(h) mm

	Display	Storage
Model RV 10	10	4
Model RV 13	13	6

BERMUDA VIEW*	RV 10	RV 13
External dimensions (LxDxH)	1340 x 814 x 1354 mm	1670 x 814 x 1354 mm
Capacity (gross/net)	300 / 255 ltr	395 / 325 ltr
Net weight	195 kg	235 kg
Refrigeration	Ventilated	
Refrigerant	R290	
Climate class	7	
Operating conditions	35 °C / 75 %RH	
Product storage temperature	-16 / -14 °C	
Compressor (no. - type)	2 - Hermetic	
Defrost process	Hot gas	
Power supply voltage	230v / 50hz / 1ph	
Electrical input (nominal)	1250 w / 5.8 A	1600 w / 8.0 A
Electrical input (defrost)	1360 w / 6.6 A	2000 w / 10.0 A



ISO 14064

*Data for air cooled units.



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification - June 2019