





Casadio DT1

Traditional espresso

Single group

The Casadio Undici is a compact, elegant, versatile machine that's easy to use, adjust and maintain. Making it the perfect addition to any business looking to add traditional espresso coffee their offer.

Construction

The Undici is constructed from a combination of steel and aluminium components for great durability.

Controls

The metal mechanical button pads lie flush with the machine panels and LED lights make the operation very user friendly.

Thermosyphon system

Undici has a fixed-nozzle thermosyphon system that's adaptable and high performing, guaranteeing excellent results every time.

Features include:

- One stainless steel steam wand.
- Each unit is equipped with four dosing selections and one continuous
- •Stainless steel hot water dispenser (metered selections).
- Graphic display with easy and ergonomic push-button programming.
- Electric cup warmer.










Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.


September 2018



Casadio DT1 Traditional espresso

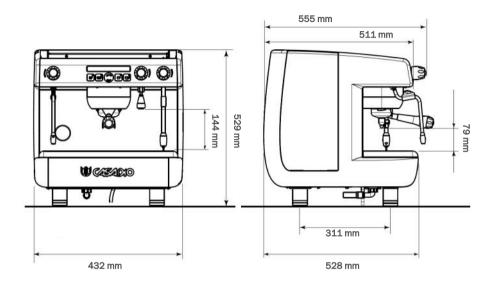

Counter cut-out location:



The 70mm \emptyset hole for services $\underline{\text{MUST}}$ be cut prior to delivery and installation.

DIMENSIONS			
Height	20.82"	529 mm	
Width	17.01"	432 mm	
Depth	21.85"	555 mm	
Counter clearance	2"	50 mm	
Maximum cup height	4.33"	79 mm	
Weight	110 lbs.	50 Kg	
Wall air clearance (minimum)*			
Back	1"	25 mm	
Sides	6 "	150 mm	

Please note - It is the clients responsibility to install an adequate cold water supply fitted with a suitable water filter, a gravity waste pipe with U-bend located directly below the machine and a dedicated power supply with isolator socket within one meter of the machine.

If any counters, worksurfaces or cupboards need cutting or adapting, this must be undertaken by the customer prior to any technical installation by Taylor UK.

*Access to all sides of the machine will be required to facilitate any service work, any machines installed with limited access or 'boxed in' preventing access may incur additional charges and possibly invalidate any warranty.

ELECTRICAL SPECIFICATION - SINGLE PHASE		
Casadio DT1		
Voltage	220-240 VAC	
Frequency	50 Hz	J•L~
Power	2,800 Watts	
Circuit breaker	13 amp	
Plug/Socket	13amp dedicate	d socket

WATER CONNECTIONS		
Cold water supply		
Fitting required	15mm pipe with 22mm (3/4") Ø Isolation valve	
Supply temperature	13 - 20 °C (55 - 68 °F)	
Supply pressure	2-3 Bar (29 - 43.5 PSI)	
Waste pipe drainage		
Fitting (on machine)	22mm (3/4") Ø	
Drainage	38mm (1-1/2") stand pipe with trap located beneath machine/counter	
Water filter	3M SGP165	

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.

September 2018



Taylor UK

Tel: +44 (0) 1473 350046

Fax: +44 (0) 1473 350001

www.taylor-company.co.uk sales@taylor-company.co.uk