

ISABELLA

Promotional ice cream display



Model RS 10



Customisable area:

Model 10 - 1295 x 560 mm
Model 13 - 1625 x 560 mm



ITEM No. _____

Model options:

- ISABELLA RS TB 10
- ISABELLA RS TB 13

Standard equipment:

- Cool white LED lighting 5700 K°
- Front panel - Sticker PM_AD1
- Side panels - Grey (E_Z065)
- Lower front grill - Grey (E_Z065)
- Swivel castors with brake
- Self rolling night curtain

Optional extras:

- 5 Lt standard Napoli pan (S/S)
- 4.75 Lt Napoli pan (S/S) (requires support kits)
- White cone holder
- Scoop wash (S/S)

Features:

- ◆ Promotional ice cream display with static refrigeration, finned evaporator and automatic hot gas defrosting.
- ◆ A second level of standard 5 litre Napoli containers (120mm H) can be stored beneath the display level.
- ◆ Equipped with an additional refrigerated storage cell in the lower part of the cabinet.
- ◆ One piece body structure with ecological polyurethane insulation (HCFC & HFC free) foamed with CO2.
- ◆ Interior and exterior in plasticised steel sheet, external stratified side panels.
- ◆ Tempered curved glass structure with LED lighting in canopy.
- ◆ Self-rolling night curtain on operators side.
- ◆ Work top in plasticised sheet.
- ◆ Built-in hermetic condensing unit with electronic control board.
- ◆ Main structure in powder coated carbon steel.
- ◆ Four pivoting wheels for easier handling.

ENERGY SAVING
LED lights

REFRIGERATION
Static

DEFROST
Hot gas

REFRIGERANT
R290

INSTALLATION
Plug-In

TEMPERATURE
-16 / -14 °C

CLIMATE CLASS
4

ENERGY RATING
C



Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk

Due to continual research and development, these specifications are subject to change without notification.

March 2021


ISABELLA - Promotional ice cream display - 10/13 flavour

ISABELLA




Promotional ice cream display

Section view: (all dimensions in mm)

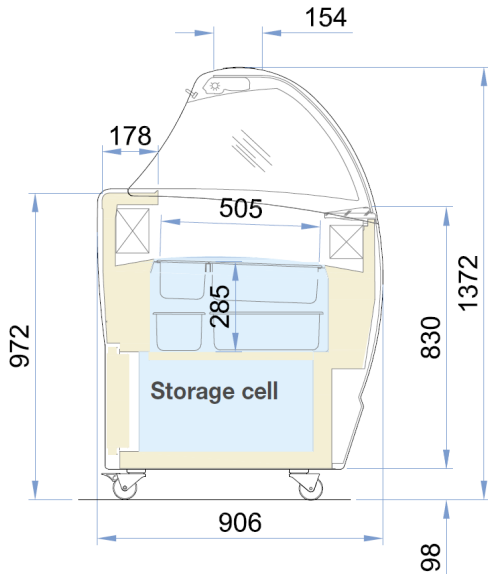

ITEM No. _____


Napoli configuration:



5 Lt (STD)
360 x 165 x 120(h) mm

Model RS TB 10
Model RS TB 13

Display	Storage
10+(10)	Yes
13+(13)	Yes



4.75 Lt
260 x 157 x 170(h) mm

Model RS TB 10
Model RS TB 13

Display	Storage
14	Yes
18	Yes

(Requires additional support kits - call for details)

ISABELLA		Model type	Display area m ²	Temp class	Reccom. temp °C	Energy class	Energy Efficiency Index	Annual Energy kWh/A
Height	Length							
H137	131	-	-	-	-15 °C	C (R290)	-	-
	164	-	-	-	-15 °C	C (R290)	-	-

Configuration: air cooled plug-in unit (R290) polycarbonate tilting panel closure, LED lighting

ISABELLA*	RS TB 10	RS TB 13
External dimensions (LxDxH)	1317 x 906 x 1372 mm	1647 x 906 x 1372 mm
Net weight	132 kg	192 kg
Refrigeration	Static	
Refrigerant	R290	
Climate class	4	
Operating conditions	30 °C / 55 %RH	
Product storage temperature	-16 / -14 °C	
Compressor (no. - type)	1 - Hermetic	2 - Hermetic
Defrost process	Hot gas	
Power supply voltage	230v / 50hz / 1ph	
Electrical input (nominal)	590 w / 3.0 A	980 w / 5.1 A
Electrical input (defrost)	1110 w / 5.2 A	1240 w / 5.8 A

Taylor UK (a division of HTG Trading Ltd)
106 Claydon Business Park, Gt. Blakenham,
Ipswich, Suffolk, IP6 0NL, United Kingdom
0800 838 896 - sales@taylor-company.co.uk
www.taylor-company.co.uk



Due to continual research and development, these specifications are subject to change without notification.



*Data for air cooled units. Water cooled and remote installations are available on request.